



## GENUINE PARTS


### INSTALLATION INSTRUCTIONS

**DESCRIPTION:** Exhaust Finisher  
**APPLICATION:** Juke (2011)  
**PART NUMBER:** Exhaust Finisher (B0091 80021)

#### KIT CONTENTS:

Item	Qty.	Part Description	Service Part Number
A	1	Exhaust Finisher Body	---
B	1	Lower Bracket	---
C	1	Pan Head Screw - M6 x 14mm	---
D	1	Installation Instructions	---

A



B



C



D



#### TOOLS REQUIRED:

- Rag
- Soft cloth
- Scale
- Torque wrench
- Phillips screwdriver

#### PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:

- Dealer Installation Recommended. Instructions may refer to Service Manual.
- No guarantee in case of improper assembly.
- Care must be taken when installing this accessory to ensure damage does not occur to the vehicle.

#### WARNING

- Ensure that the exhaust pipe is cool. If car has been running, turn the engine off and allow the exhaust pipe to cool for a sufficient time.


#### CAUTION

- Install this accessory on proper position instructed by this sheet. If not exhaust finisher may interfere with other parts, or make an abnormal noise.
- Secure finisher to torque spec. Loose-securing may cause the exhaust finisher fall off.


#### NOTE:

- Please check that the Screw were tightened periodically.
- This exhaust finisher made of stainless steel. Nevertheless, it is possible to get rusty under the hard condition. In case of rusting, washing with water and wipe with liquid detergent. Besides washing with water and wipe off with dry cloth.


## INSTALLATION PROCEDURE:

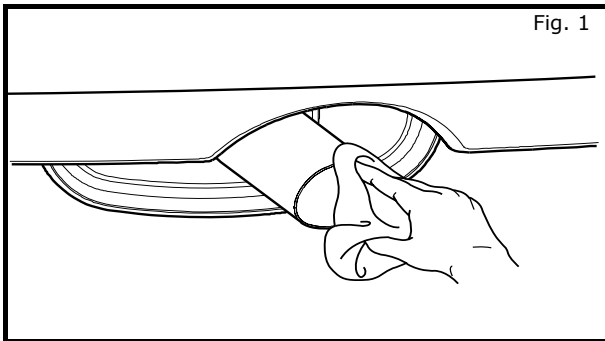


- 1) Clean the vehicle's exhaust pipe around installation area with rag and ensure it is free of dirt and debris.

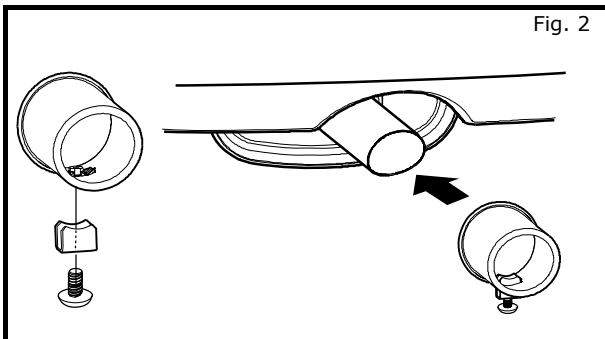

- 2) Remove the exhaust finisher from package and loosen the pan head screw.
- 3) Slide the exhaust finisher over the vehicle's exhaust pipe.

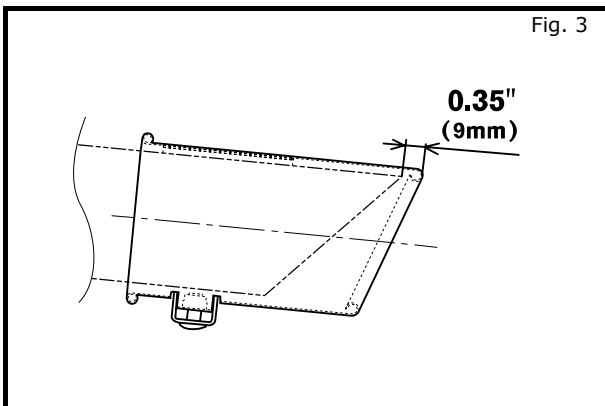

- 4) Position the exhaust finisher at 0.35"(9mm) behind from vehicle's exhaust pipe end and temporarily tighten the screw.

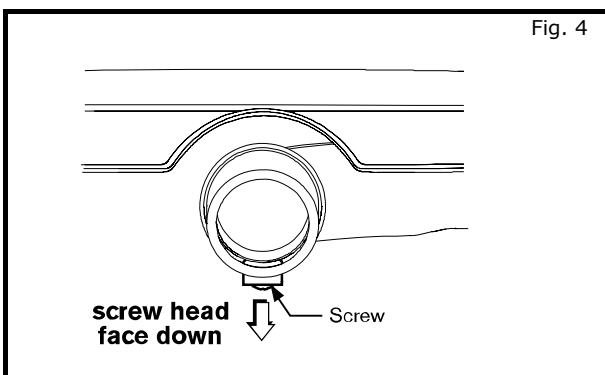

- 5) Tighten the screw to a static torque value of 13.3 - 17.7 lbin(1.5 - 2.0 Nm), ensuring the screw head face down.
- 6) Clean the exhaust finisher with soft cloth.

## ACCESSORY CHECK:

Prior to competition, verify the following:

- ☐ Exhaust finisher body does not touch with vehicle's bumper or exhaust pipe.
- ☐ The screw is not loose.