



## GENUINE PARTS

### INSTALLATION INSTRUCTIONS

**DESCRIPTION:** Nose Mask  
**APPLICATION:** Leaf (2011)  
**PART NUMBER:** 999N1 8X000

#### KIT CONTENTS:

Item	Qty.	Part Description
A	1	Nose Mask
B	6	Installation Instructions
C	8	Hardware Kit, Squarehead Retainers (6), Snap Screws (6)

#### TOOLS REQUIRED:

- Scissors
- Phillips Screwdriver

#### PRE-INSTALLATION CAUTIONS/NOTES:

- The area to be covered by the mask must be free of dirt. The flannel surface of the nose mask must be especially clean.
- Both the vehicle and the mask must be completely dry. If moisture is present under the mask and is allowed to dry, it may cause the paint to cloud. If mask gets wet, remove and allow to dry completely.
- Any repainted surface in contact with mask must be completely cured.
- DO NOT pull the mask from any of the openings when installing the mask. This may result in DAMAGE to your mask.
- If the nose mask should flap due to high speed or wind conditions, stop car and adjust or remove mask.

#### CARE OF NOSE MASK:

- To clean the vinyl and flannel backing, use a cleaner such as "409" or "Fantastic".
- The vinyl surface may be cleaned by simply spraying the cleaner onto the vinyl and wiping off with a cloth or sponge.
- To clean the flannel backing, liberally spray the cleaner on the area to be cleaned. If heavily soiled, use a cloth or sponge with the cleaner and rub the soiled area gently. Repeat if necessary. Rinse completely with clear water when finished. Hang to dry, but not in direct sunlight. Before installation, ensure both the vehicle and the nose mask are completely dry. If there is moisture under the nose mask and it is not allowed to dry, paint clouding can occur.

#### CAUTION

- Attach all elastics with hooks and clips carefully and securely. Accidental release may cause injury.

## INSTALLATION INSTRUCTIONS - Nose Mask

### INSTALLATION PROCEDURE:

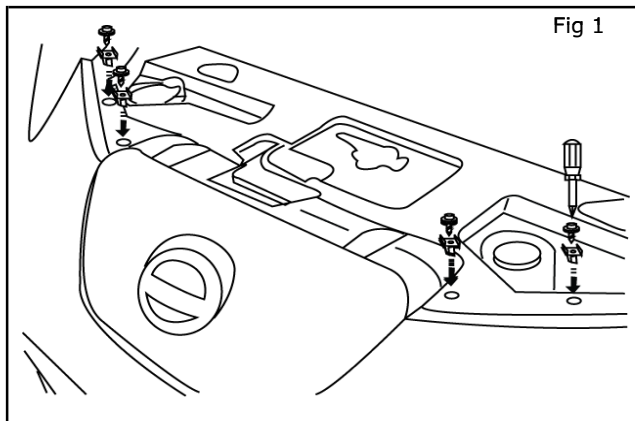


Fig 1

- 1) Remove/Install fasteners
  - a) Remove 4 push pins.
  - b) Install 4 squarehead retainers with 4 screws.

- 2) Remove license plate and license plate bracket (if applicable).
  - a) Remove 2 license plate screws.
  - b) Remove 2 license plate bracket screws.

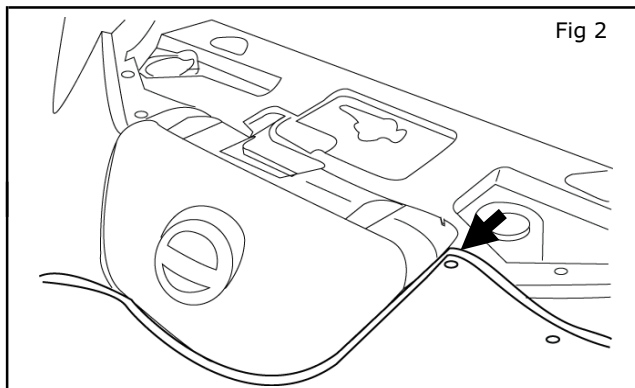


Fig 2

- 3) Install mask at wheel wells.
  - a) Snap mask at one location at drivers side to hold mask in place.


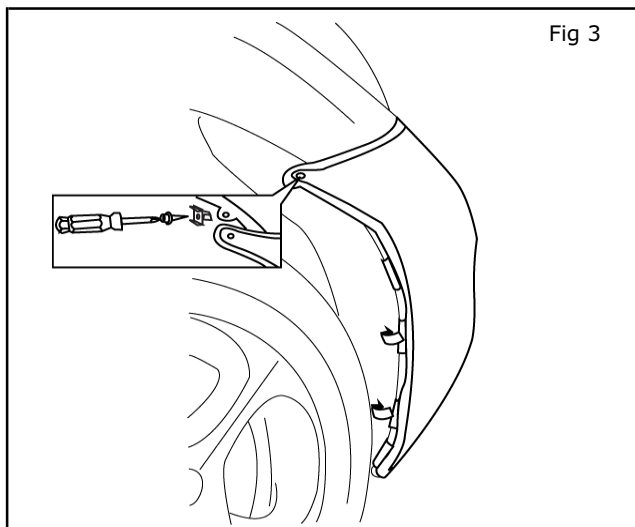


Fig 3


- b) Remove push pin at wheel well area at both RH & LH area and install squarehead retainer with screw.
  - c) Install snap stud into wheel well at passenger side and attach 2 inner clips.

## INSTALLATION INSTRUCTIONS - Nose Mask


### INSTALLATION PROCEDURE:

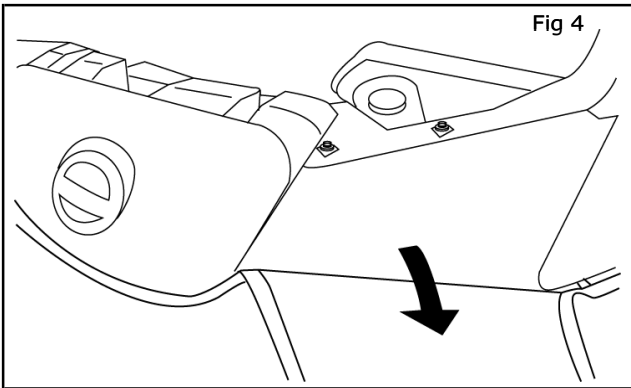

- d) Unsnap previous attachment used to hold mask in place and fold down.

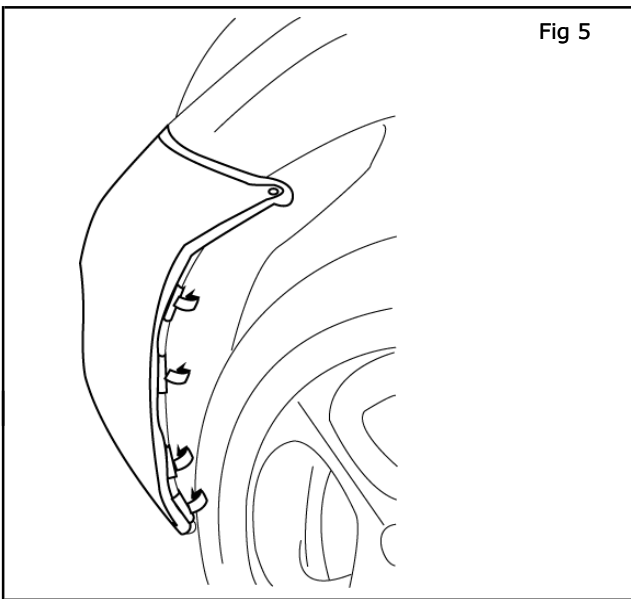


- e) While pulling mask attach snap stud at drivers side wheel well and attach all 4 clips.

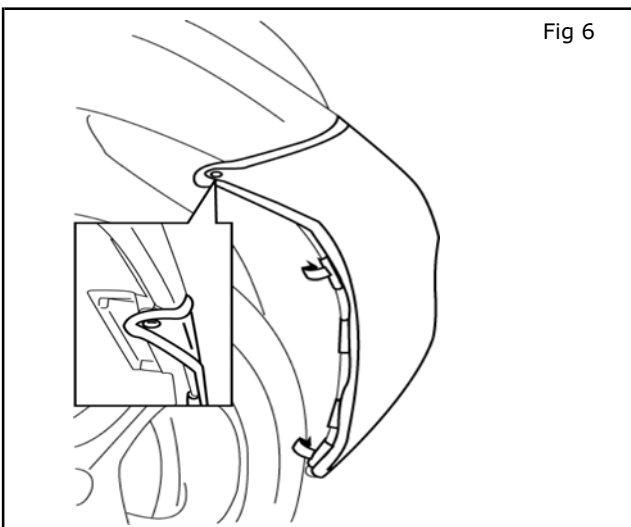


- f) Install top and bottom clip in passenger side to inside edge of wheel well.

## INSTALLATION INSTRUCTIONS - Nose Mask


### INSTALLATION PROCEDURE:

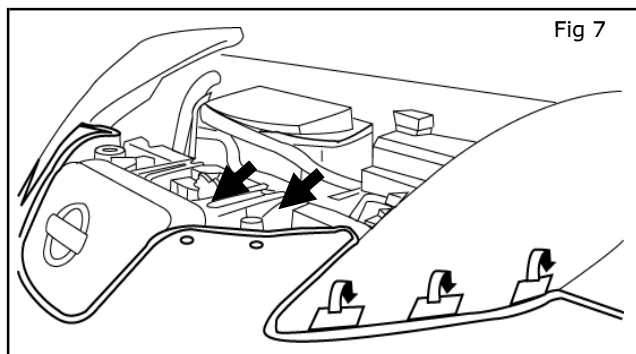

- 4) Secure mask at headlights.
  - a) Insert the pads into the gap under the headlight.
  - b) Snap mask into place at newly installed screw/squarehead retainer.
  - c) Repeat steps a) and b) on the other side.

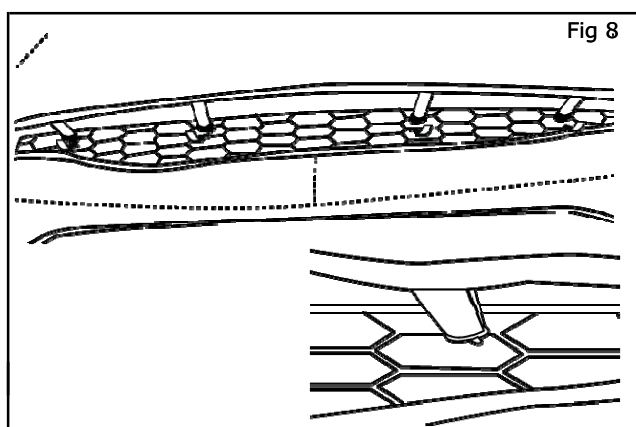


- 5) Install mask at upper grille opening.
  - a) Attach 4 S-Hooks into upper grille opening as shown in the illustration.

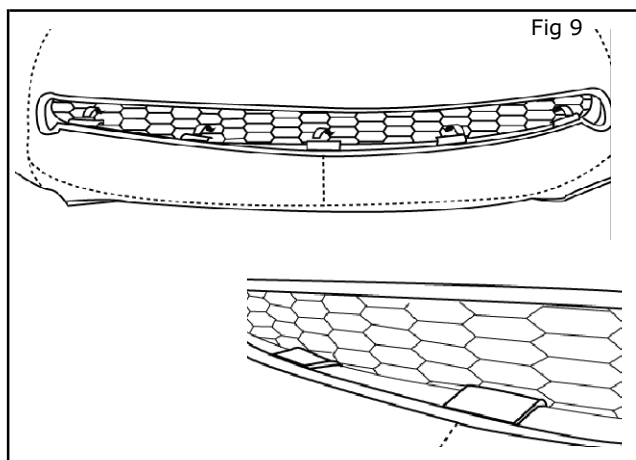

- 6) Install mask at lower grille opening.
  - a) Insert 5 pads into grille openings that correspond with pads location as shown in illustration.

## INSTALLATION INSTRUCTIONS - Nose Mask

### INSTALLATION PROCEDURE:

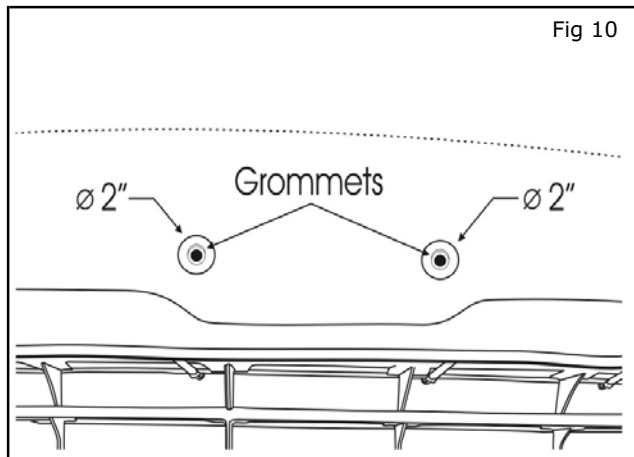

- 7) Reinstall License plate and license plate bracket (if applicable).
  - a) Poke holes through mask into center license plate bracket grommets.
  - b) Cut clearance holes (1"-2") so that license plate bracket pads will rest on fascia.
  - c) Reinstall license plate bracket and plate.