



GENUINE PARTS

INSTALLATION INSTRUCTIONS

DESCRIPTION:	Kick Plates - Non Illuminated
APPLICATION:	Titan
PART NUMBER:	999G6 W3200

KIT CONTENTS:


Item	Qty.	Part Description	Service Part Number
A	1	Kicking Plate Front RH	769B4 EZ25A
B	1	Kicking Plate Front LH	769B5 EZ25A
C	1	Kicking Plate Rear RH	769B6 EZ20A
D	1	Kicking Plate Rear LH	769B7 EZ20A
E	1	Installation Instruction Replacement Template	



A



B



C



D

Important! Read Before Installation!

WARNING

CAUTION: Do not touch the surface of the kick plate. The surface is coated with a special finish. Touching the surface may cause the finish to become scratched or damaged. If the surface is scratched or damaged, the kick plate will not function properly. Do not use any abrasive cleaners or solvents on the surface. Use only a soft, dry cloth to clean the surface.

CUSTOMER INSTALLATION INSTRUCTIONS: Consulting an authorized dealer is recommended for proper installation. For more information, please contact your dealer or visit us online at www.nissanusa.com. Dealer assistance is available for all Nissan models. Dealer assistance is available for all Nissan models.

DEALER ASSISTANCE INSTRUCTIONS: Dealer assistance is available for all Nissan models. Dealer assistance is available for all Nissan models.

E


TOOLS REQUIRED:

- Trim Install/Removal Tool


PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:

- Dealer Installation Recommended. Instructions may refer to Service Manual.


INSTALLATION PROCEDURE FOR KICKING PLATE FRONT:

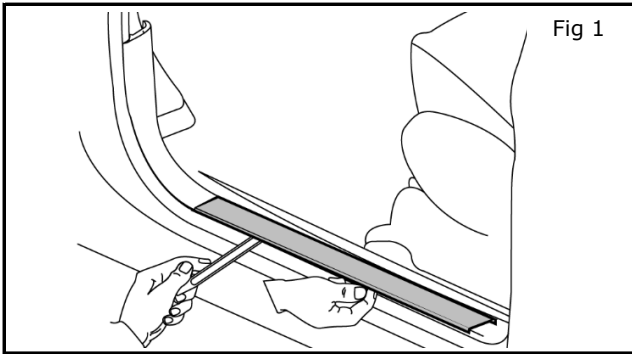

- 1) Removal of existing kick plate.
 - a) Insert plastic trim removal tool under kick plate. Carefully Loosen and lift kick plate for removal.

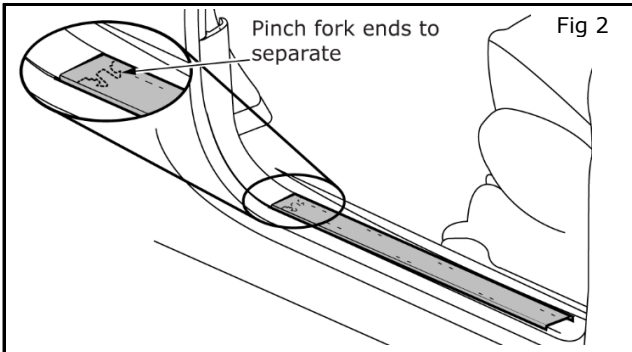


- b) Lift kick plate from rear to front, disengaging from clips. Separate the Kick Plate from dash side panel by pinching the fork and sliding the kick plate rearward.

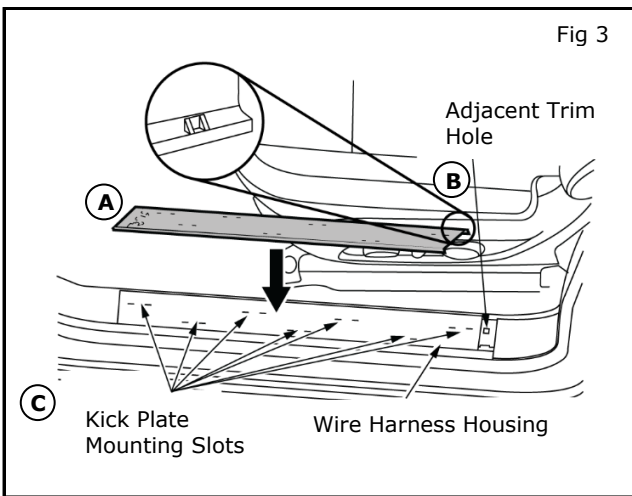


- 2) Install new kick plate.
 - a) Slide front over fork shaped end (A).
 - b) At rear of kick plate, ensure locating feature (B) is properly positioned. Ensure snap features at edge of kick plate are engaged.
 - c) Engage 7 large clips with corresponding slots (C) in wire harness housing and press down in each of seven locations for reinstallation.

- 3) Repeat procedure for opposite side.

INSTALLATION PROCEDURE FOR KICKING PLATE REAR:

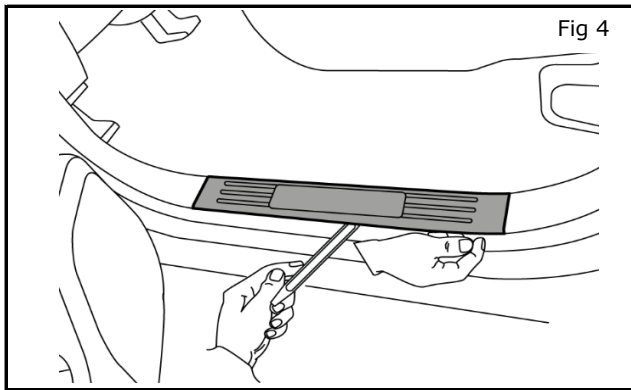

- 4) Removal of existing kick plate.
Insert plastic trim removal tool under kick plate. Carefully Loosen and lift kick plate for removal, disengaging push pins.

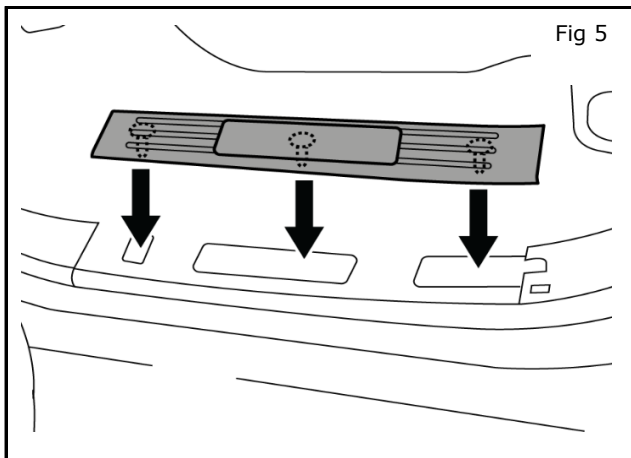

- 5) Install new kick plate
 - a) Align three (3) Push pins with corresponding slots in wire harness housing and press down in each of three locations to begin reinstallation.
 - b) At front of kick plate, ensure locating features are properly positioned. Ensure snap feature at the front and rear edge of the kick plate are engaged.
- 6) Repeat procedure for opposite side.