





# GENUINE PARTS

## INSTALLATION INSTRUCTIONS

<b>DESCRIPTION:</b>	Blind Spot Mirror Accessory Kit
<b>APPLICATION:</b>	Rogue
<b>PART NUMBER:</b>	999L1-G2000 + 999L1-G20H0

### KIT CONTENTS:

Item	Qty.	Part Description	Service Part Number
A	1	Blind Spot Mirror - LH	2084.6059/6061
B	1	Blind Spot Mirror - RH	2084.6060/6062
C	1	Installation Instruction Replacement Template	2084.9001

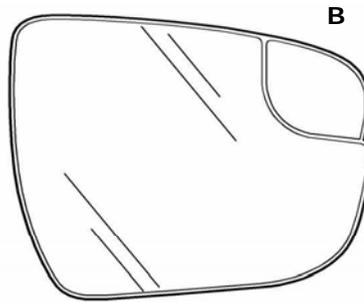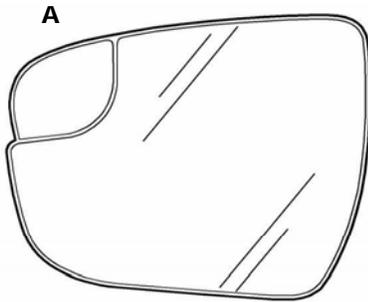


### TOOLS REQUIRED:

- Carbon Fiber Pry Tool with Narrow Tip
- Masking Tape
- Flathead Screwdriver


### PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS and NOTES:

- These installation instructions are for the left side of the vehicle; the same procedure applies to the right side.
- Dealer Installation recommended.
- Protective gloves are recommended to prevent damage and/or scratches to the mirror and vehicle.


## INSTALLATION PROCEDURE:

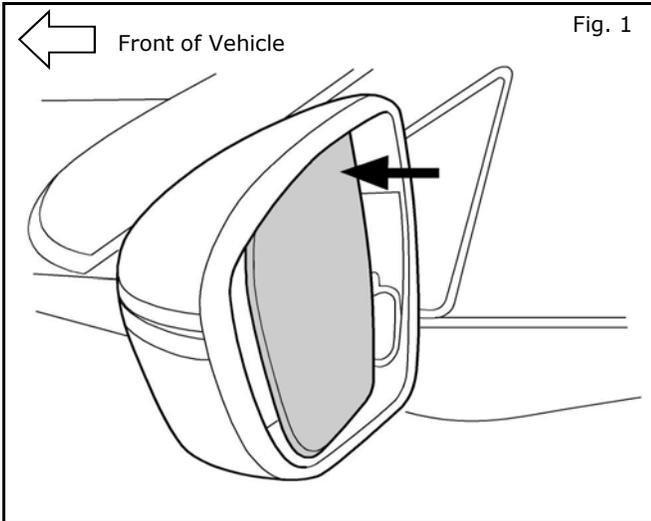

- 1) Adjust the driver side mirror so the glass is tipped inboard as much as possible. This will expose the access point for removing the existing glass assembly from the mirror housing

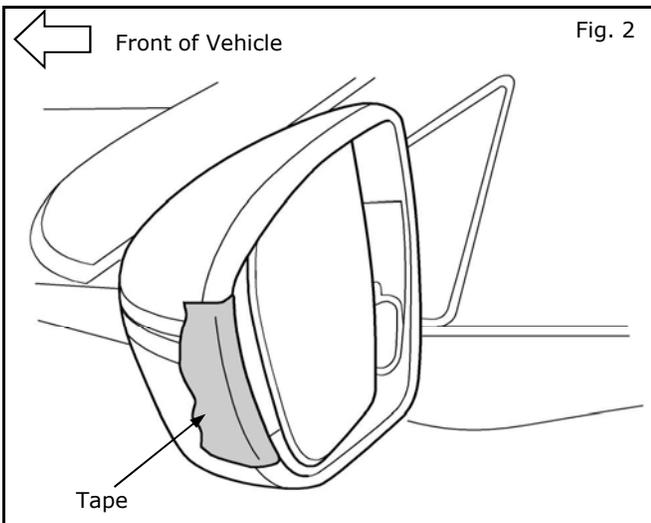


- 2) Apply protective tape to the outer edge of the mirror housing as shown to protect it from damage while removing the mirror glass assembly.

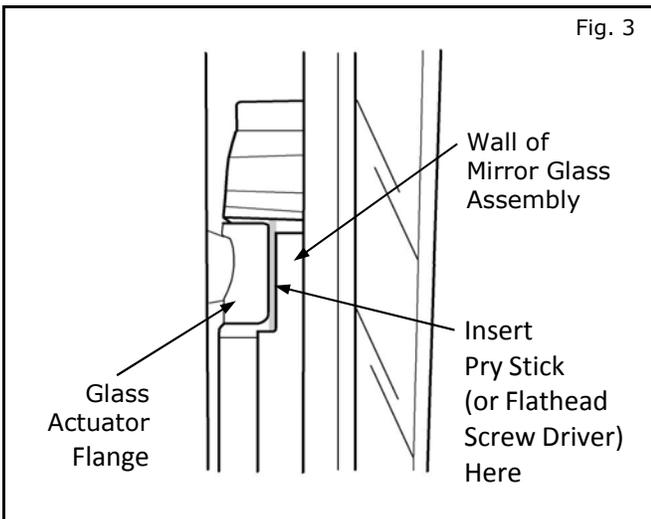


- 3) Looking in through the edge of the mirror housing, locate the intersection between the flange of the glass actuator and the back wall of the mirror glass Assembly. Insert a pry stick with a narrow tip or a flathead screwdriver and carefully pry off the glass assembly.

## INSTALLATION PROCEDURE:

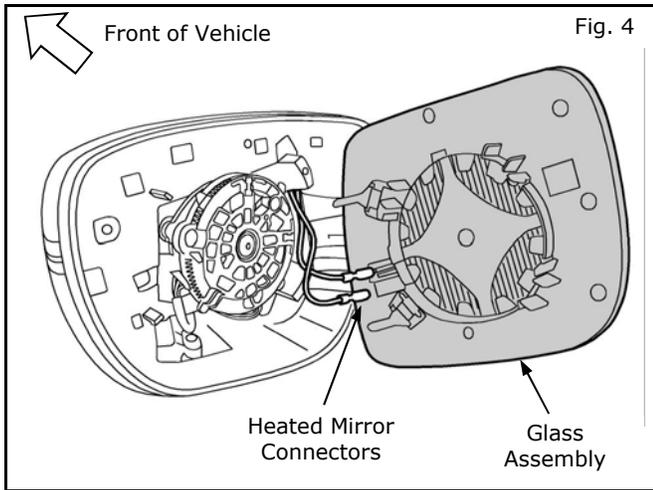


4) Carefully remove the glass assembly from the mirror housing.

**NOTE: If the mirror being serviced is a heated mirror, there will be two wires that need to be disconnected from the back side of the glass assembly.**

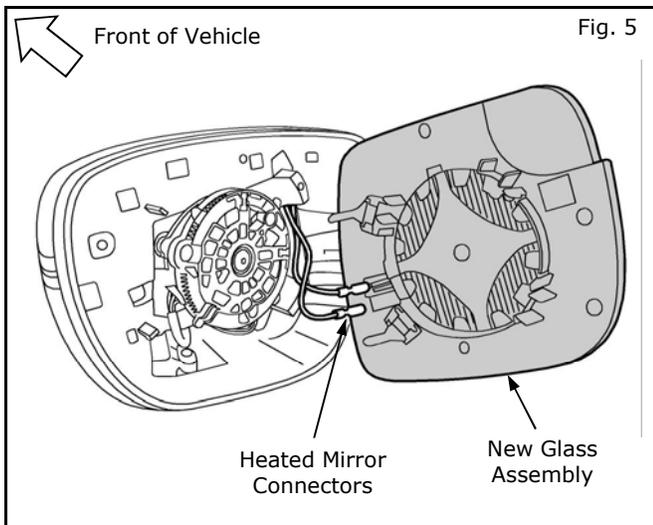

5) Begin installation of the new Blind Spot Mirror Glass Assembly by reconnecting the heater wires if necessary.


**NOTE: Both wires are black and it does not matter which wire goes to which post.**

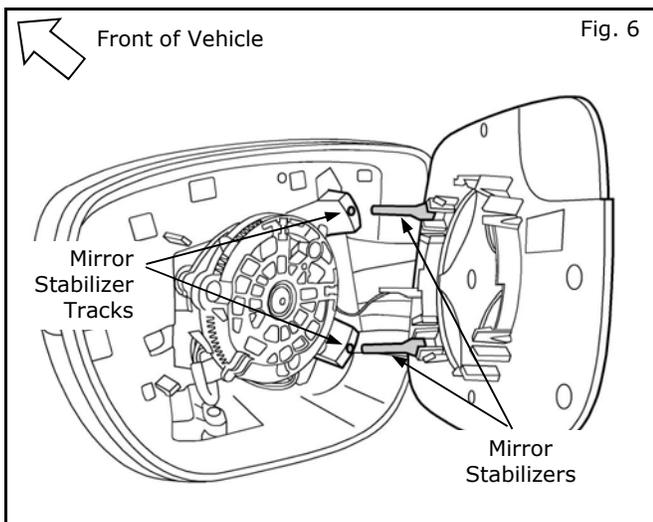

6) During installation, be sure that the two **mirror stabilizers** are lined up with the two stabilizing tracks in the mirror housing as the mirror assembly is placed into position over the glass actuator.

**NOTE: Be sure that the new glass assembly is centrally located within the perimeter of the mirror housing**

## INSTALLATION PROCEDURE:

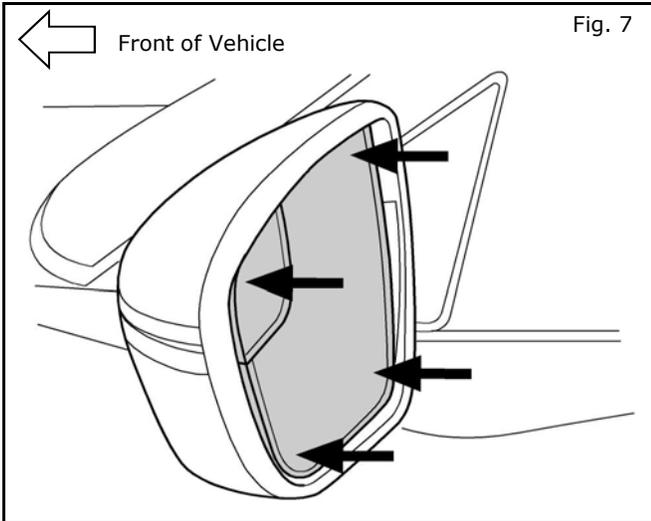

- 7) Using even pressure, press firmly on the new glass assembly to seat it into the mirror housing. Take care that the initial force applied is **perpendicular** to the Mirror Housing. You will hear and feel a definitive snap as the mirror glass assembly engages with the glass actuator. Once the new glass assembly is secured, carefully rock the assembly into each corner and direction within the Mirror Housing while still applying firm pressure to insure that the snaps are properly engaged.

**NOTE: Use extreme caution to not apply excessive force as this may cause irreversable damage to the glass assembly.**

- 8) Remove the protective tape and clean any finger prints, smudges, or tape residue that may have resulted from the installation.

- 9) **Repeat for passenger side of vehicle**