



GENUINE PARTS

INSTALLATION INSTRUCTIONS


DESCRIPTION: Cargo Area Protector

APPLICATION: Pathfinder

PART NUMBER: 999C3 X3000
999C3 X3004 (No Cut-Out)

KIT CONTENTS:

Item	Qty.	Part Description	Service Part Number
A	1	Cargo Area Protector	999C3 X300x
B	12	Hook and Loop Adapter (comes attached to underside of protector)	Not Available
C	1	Installation Instruction Replacement Template	999V2 AW000

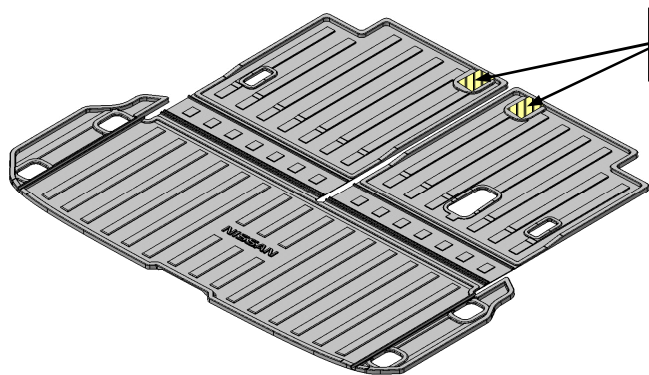

999C3 X3000: Has Cut-Out
999C3 X3004: No Cut-Out



A

B

C

TOOLS REQUIRED:

- N/A

PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:

- To maintain luster of your protector, clean with a cloth as required using soap and water.


Note: Protector is equipped with very aggressive hook fastener on underside. Do not place protector in the cargo area without due care. Hook fastener will affix itself to ANY carpet surface. Use care when placing into vehicle.

⚠ WARNING

- Protector is designed to transport normal cargo contents. Flammable or dangerous materials should not be transported in your vehicle at any time.

INSTALLATION PROCEDURE:


Fig. 1

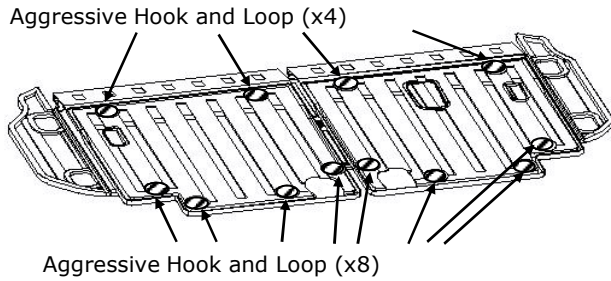

Note:


- **Protector is equipped with aggressive hook fastener on underside. DO NOT PEEL THE BACKING OFF UNTIL DIRECTED TO.**
- **Use care when placing into vehicle.**

Fig. 2

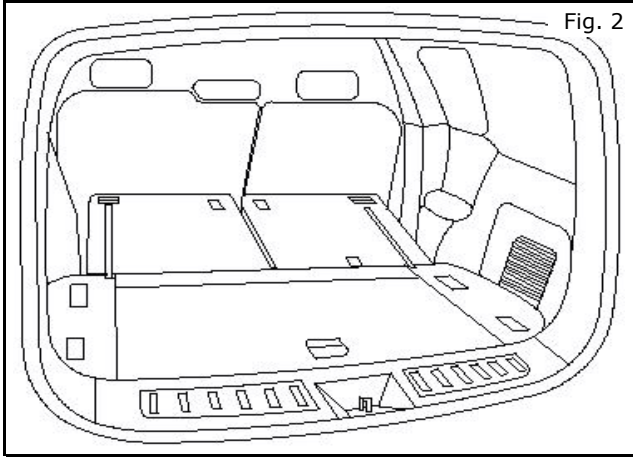


- 1) Fold down headrests and 3rd row seats.

Fig. 3

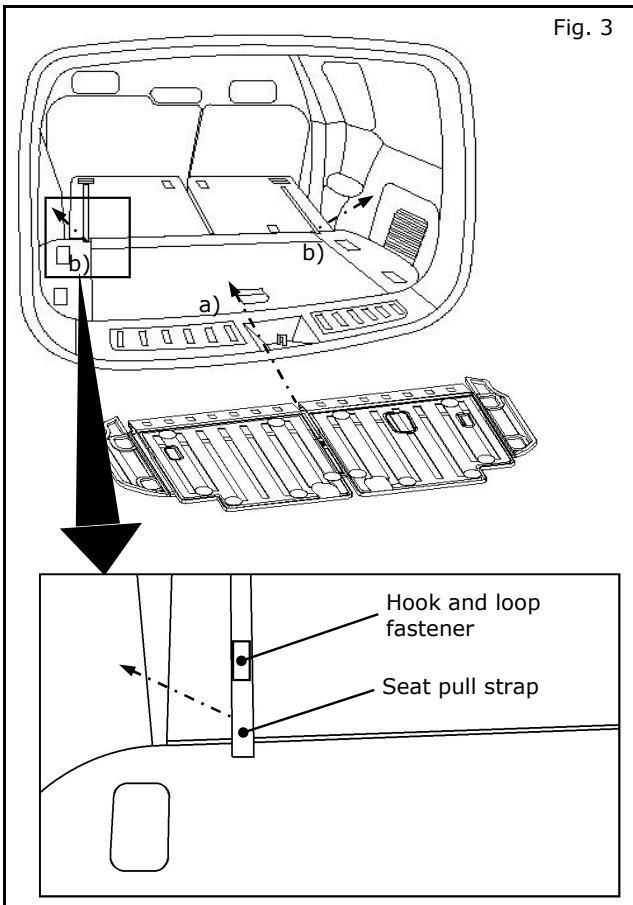


- 2) With protector in folded position:
 - a) Place protector into vehicle cargo area and align tray openings with tie-down hooks.
 - b) Disconnect hook and loop fastener on seat pull straps. Move both seat pull straps aside.


INSTALLATION PROCEDURE:

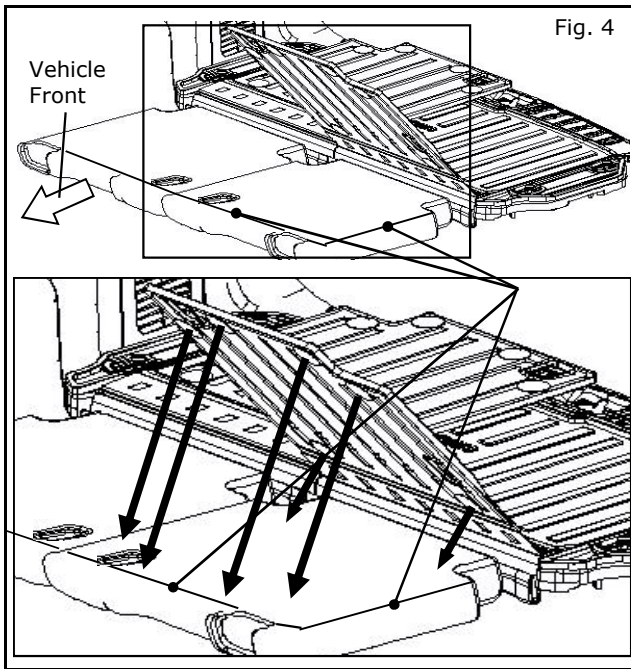

- 3) Unfold driver's side protector flap and align edges and openings to seat back edges and features.
- 4) Hold part in place and carefully remove backing off each aggressive hook fastener.
- 5) Repeat steps 3) and 4) for passenger's side.

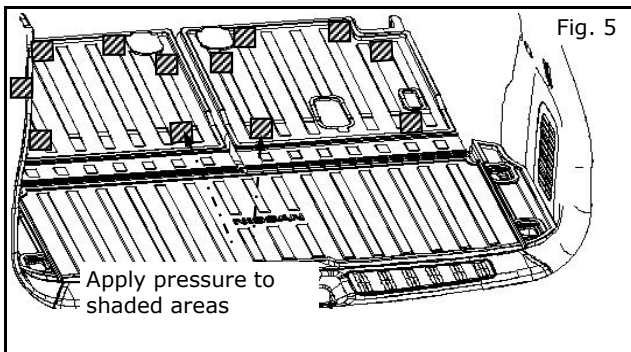


- 6) Apply pressure to shaded areas in Figure 5 to secure hook and loop adapters.

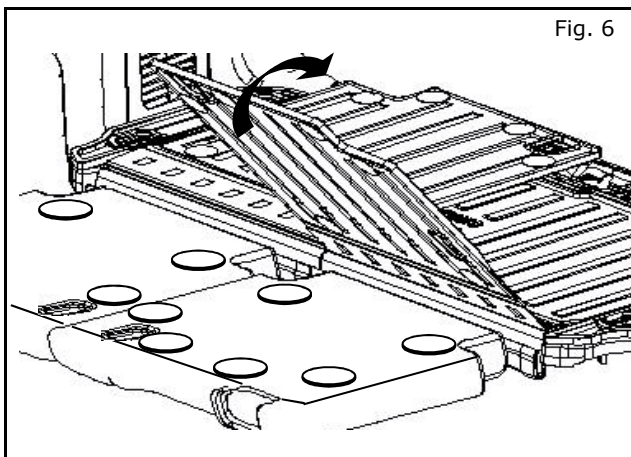

- 7) When protector is removed from vehicle, 2" round hook/loop adapters remain attached to load floor carpet.

Note: Do not remove adapters after they have been properly installed.

INSTALLATION PROCEDURE:

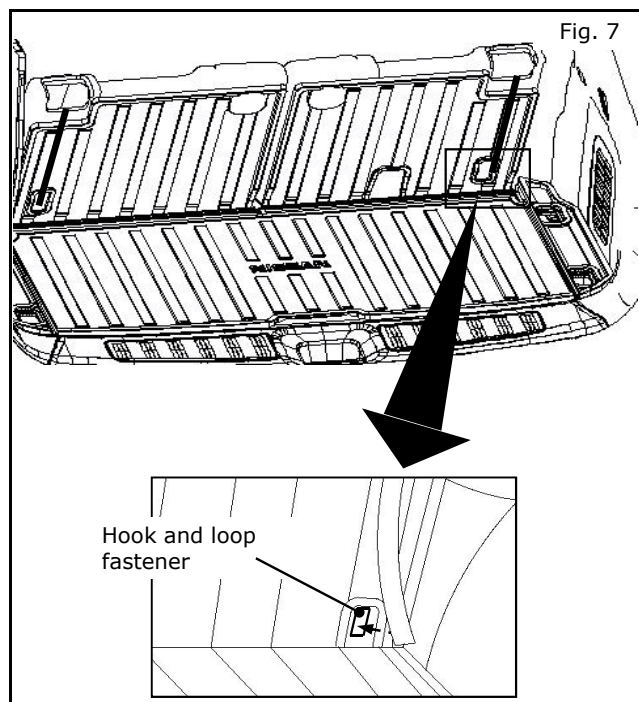

- 8) Pull seat straps to return seats to original position and re-attach seat straps to hook and loop fasteners.