



ORIGINAL PARTS

INSTALLATION INSTRUCTIONS


DESCRIPTION: Exhaust Tube Finisher

APPLICATION: KICKS


PART NUMBER: T99M6 5RL0A

KIT CONTENT:


Item	Qty.	Description	Part Number
A	1	Exhaust Tube Finisher	---
B	1	Hexagon Bolt	---
C	1	Installation Instructions	---

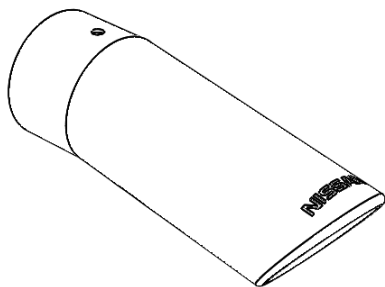

A



B



C


TOOLS REQUIRED:

- Socket wrench
- 17mm socket
- Torquemeter
- Loctite (272 or 278)

⚠ CAUTION


- Do not install this accessory if exhaust tube is hot.
- It is recommended to make exhaust tube finisher installation by a NISSAN authorized dealer. Otherwise vehicle could lose warranty by wrong installing.

INSTALLING PROCESS:

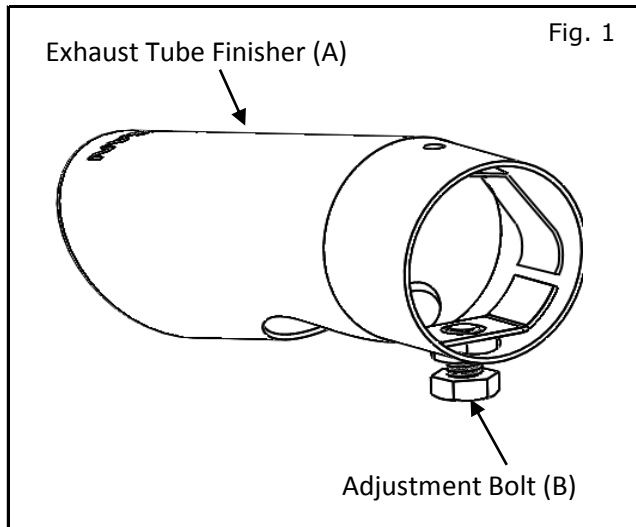


- 1) Apply some loctite on hexagon bolt.
Hand start bolt in the Exhaust Tube Finisher's nut:
Bolt shall be placed below the finisher and nut. See figure 1.

Lightly tighten the bolt. Bolt thread shall not pass through out the internal bracket yet.

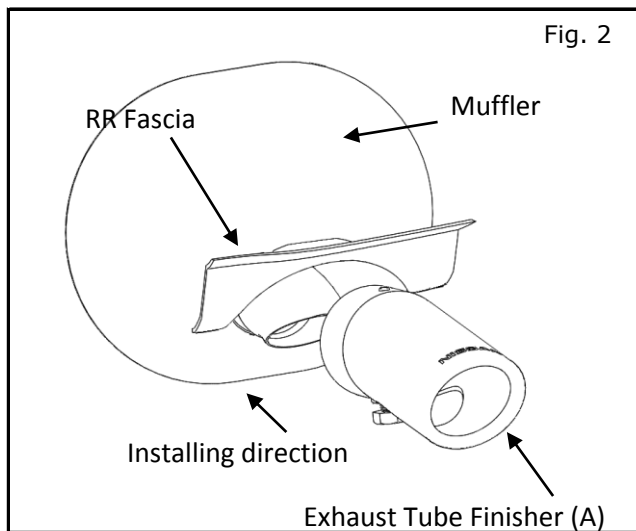


- 2) Install the exhaust tube finisher over exhaust pipe. See figure 2.

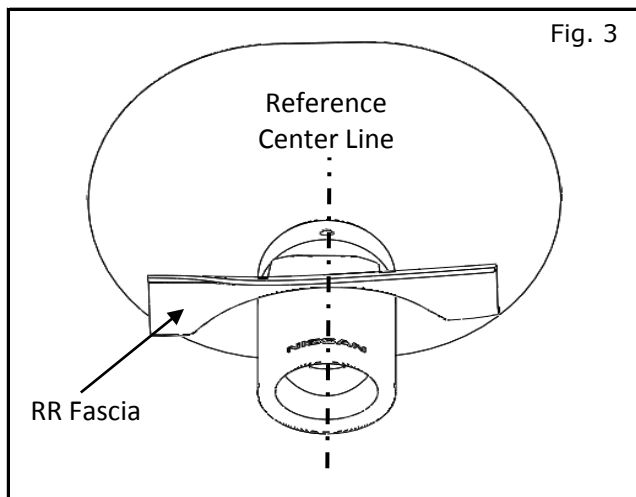


- 3) Align and center exhaust tube finisher locating NISSAN logo at the top side. See figure 3.

INSTALLING PROCESS:

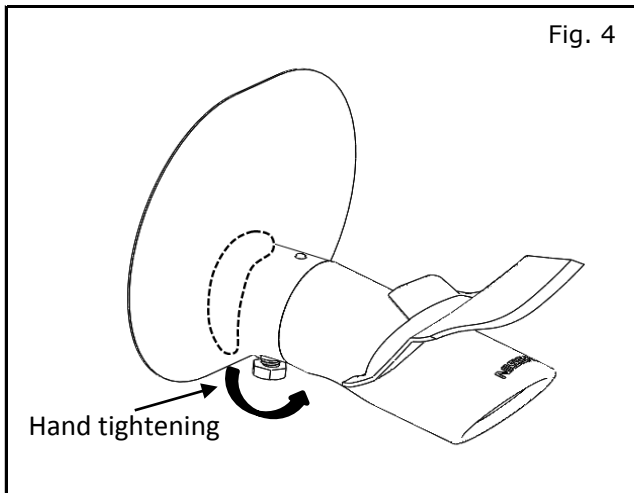

- 4) Adjust the exhaust tube finisher to contact the vehicle muffler wall. Lightly tighten bolt by hand, enough to maintain the part in place. See figure 4.

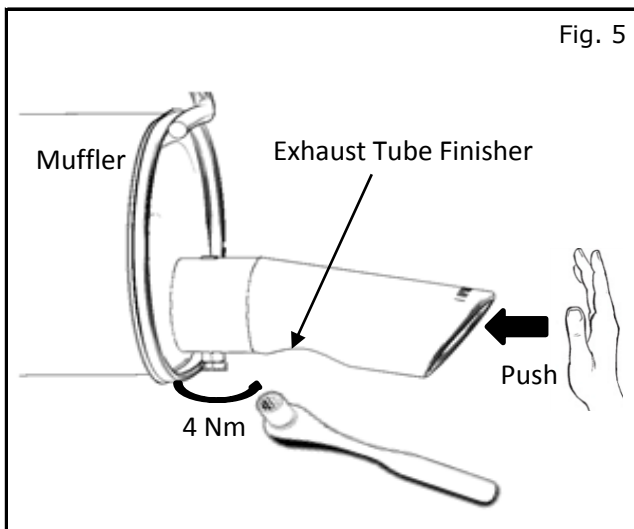

- 5) Once exhaust finisher is located, tighten bolt to 4 Nm by using a torquemeter while pushing the exhaust finisher against muffler. See figure 5.
- 6) Check that finisher is aligned, if not loosen bolt and repeat steps 3) through 5).

Note: Tighten bolt every 6 months.

Final Inspection:

- ☐ Verify there are not damages to vehicle.
- ☐ Check there are not forgotten tools by the installing area.
- ☐ Be sure the bolt be correctly tight.