



## GENUINE PARTS

### INSTALLATION INSTRUCTIONS

1. **DESCRIPTION:** Rear Bumper Protector Kit

2. **APPLICATION:** Rogue

3. **PART NUMBER:** 999T6 GU000

4. **KIT CONTENTS:**

Item	Qty.	Description	Part Number
A	1	Rear Bumper Protector	---
B	2	Alcohol Pads	---

5. **TOOLS REQUIRED:**


- Clean, Lint-Free Wiping Cloth
- 90% or above Isopropyl Alcohol

6. **PRE-INSTALLATION CAUTIONS/NOTES:**

#### CAUTION

- Install the rear bumper protector when the ambient temperature is above 60°F (15°C).
- Do not wash or expose the vehicle to a wet environment for 24 hours after installing the rear bumper protector.


7. **INSTALLATION PROCEDURE:**

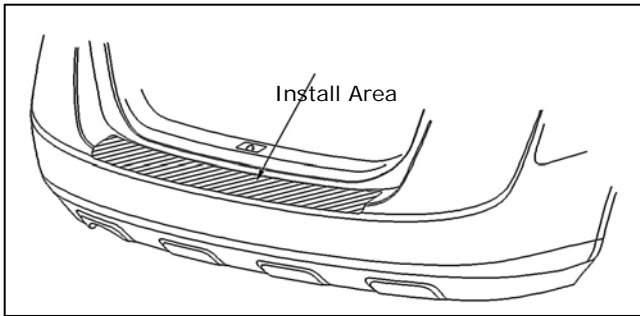





- 1) Rear bumper protector installation
  - a) Open rear hatch.
  - b) Clean each vehicle rear bumper thoroughly with soap and water to remove any dirt or debris and allow to dry.
  - c) Use alcohol prep pads or 90% or above isopropyl alcohol with a lint free cloth to clean the mounting surface of the rear bumper. Let dry thoroughly. (Fig. 1)

#### CAUTION

- Failure to clean the mounting surface properly may cause the adhesive tape to have poor adhesion to the vehicle.
- d) Peel back approximately 30mm of all the tape liners and fold them 90 degrees so they are sticking out the sides of the bumper protector. (Fig. 2)



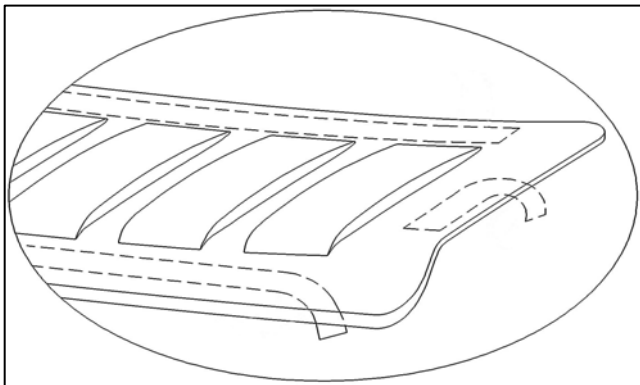


## INSTALLATION INSTRUCTIONS - Rear Bumper Protector Kit

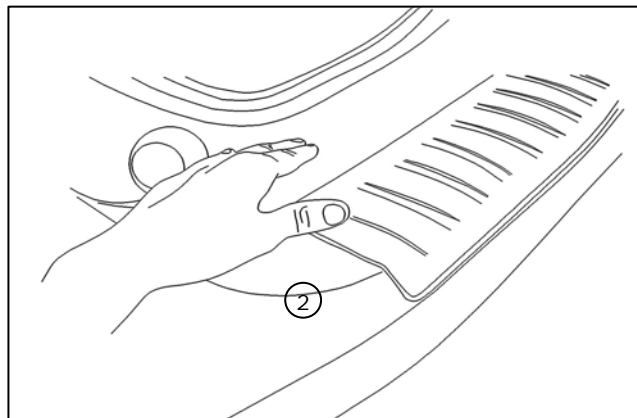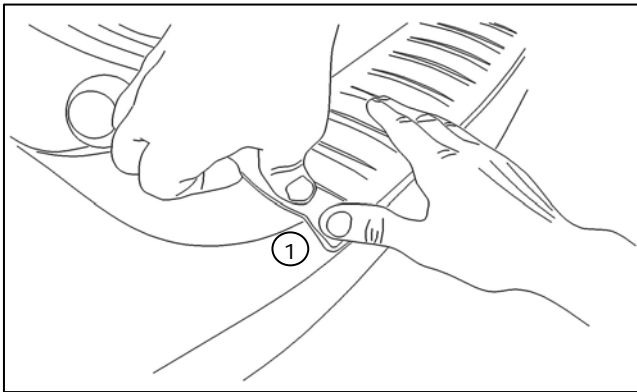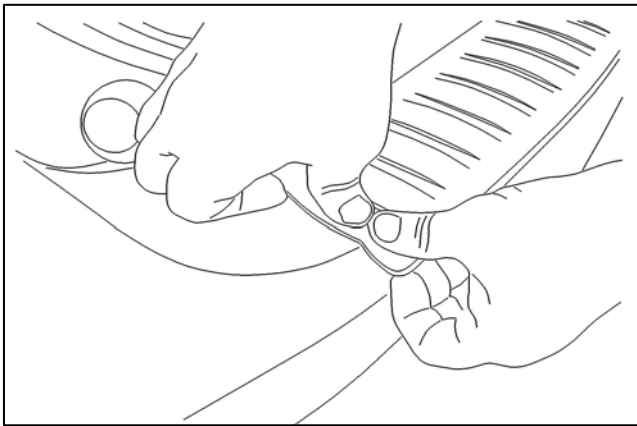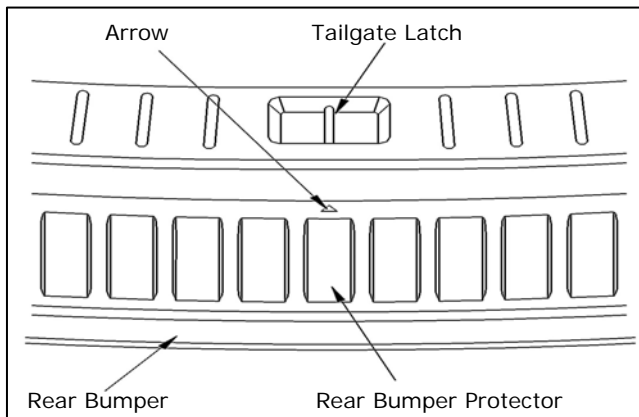

- e) While holding the rear bumper protector above the rear bumper, align center arrow with tailgate latch and place the rear bumper protector on the rear bumper.
- f) Use two hands to lift and hold the left-side, rear bumper protector edges to avoid contact between the left-side rear bumper protector tape surface and the rear bumper.
- g) While lifting and holding the left side rear bumper protector edges, align the rear bumper protector radius to the rear bumper radius.
- h) Tack the rear bumper protector to the rear bumper at position ①
- i) Tack the rear bumper protector to the rear bumper at position ②
- j) Repeat steps f) through i) on the right side of the rear bumper protector.

## INSTALLATION INSTRUCTIONS - Rear Bumper Protector Kit

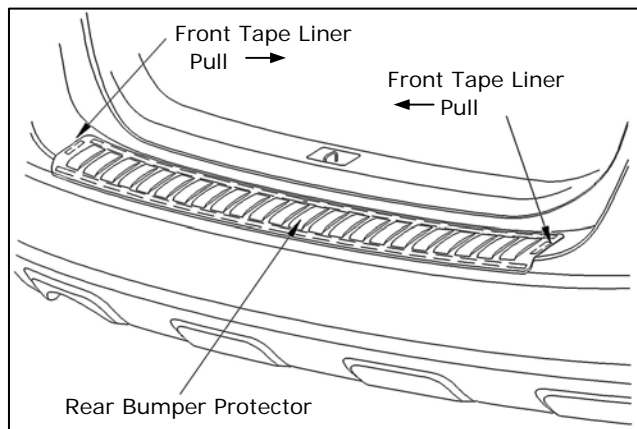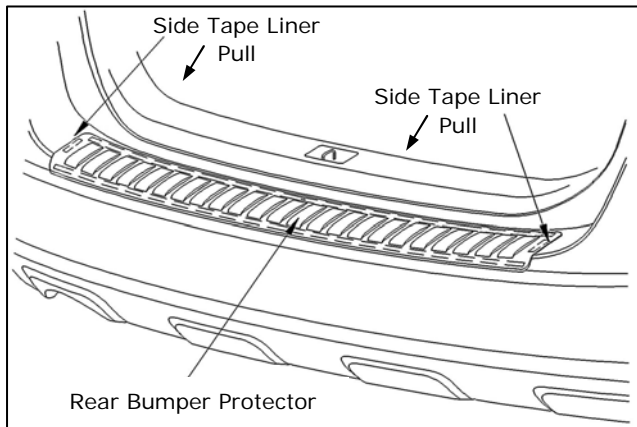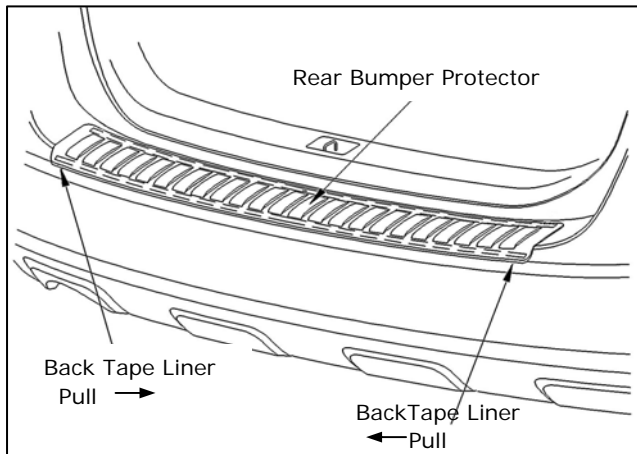

- k) Confirm that the arrow is aligned with the tailgate latch and the rear bumper protector radii are aligned with the rear bumper radii. If not, un-tack rear bumper protector and repeat steps e) through h).
- l) Remove back tape liners.
- m) Starting at the center, apply 15 lbs (103 kPa) of pressure along the tape length to attach the rear bumper protector.
- n) Remove side tape liners.
- o) Apply 15 lbs (103 kPa) of pressure along the tape length to attach the rear bumper protector.
- p) Remove front tape liners.
- q) Clean each vehicle rear bumper thoroughly with soap and water to remove any dirt or debris and allow to dry.
- r) To ensure the rear bumper protector is attached, apply 15 lbs (103 kPa) of pressure along the tape length across the entire part.
- s) Close the rear hatch, and confirm there is no interference.