




GENUINE PARTS

INSTALLATION INSTRUCTIONS

1. DESCRIPTION:	Aluminum Kick Plate	
2. APPLICATION:	Rogue (2008 and later)	
3. PART NUMBER:	999M1 GU010	
4. KIT CONTENTS:		
Item No.	Qty	Description
A	1	Right Front Kick Plate Assembly
B	1	Left Front Kick Plate Assembly
C	1	Right Rear Kick Plate Assembly
D	1	Left Rear Kick Plate Assembly
E	1	Installation Instructions Replacement Template

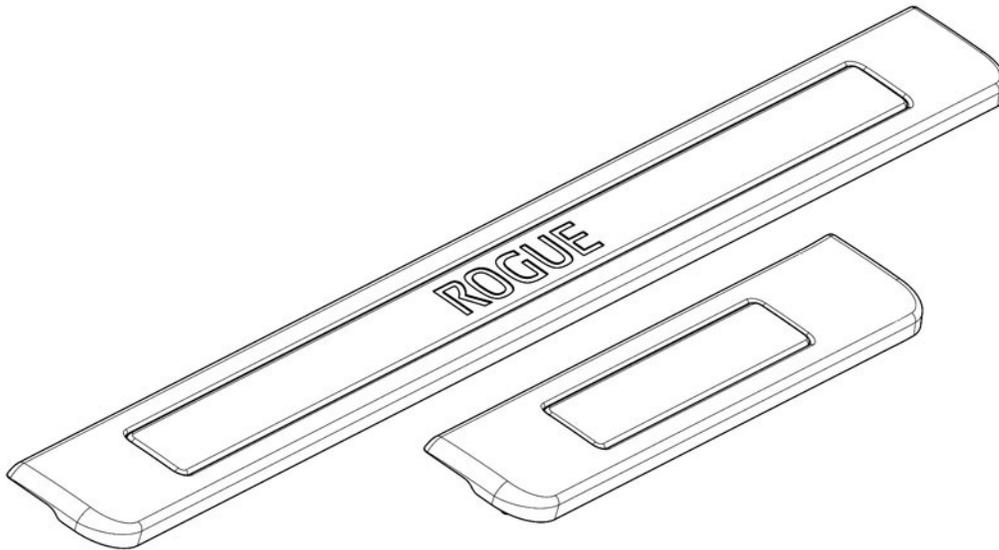

B & D – Left Front & Left Rear Kick Plate Assembly is shown. Right Side is symmetrical.

5. TOOLS REQUIRED:



Nylon Trim Removal Tool
Cloth

6. INSTALLATION PRECAUTIONS AND NOTES:

- 1) The following chemicals may damage Kick Plate Assembly if exposed
 - a) Gasoline
 - b) Kerosene

Install this product while observing all warnings and precautions stated in this manual.

INSTALLATION INSTRUCTIONS – Aluminum Kick Plate

7. FRONT INSTALLATION PROCEDURE

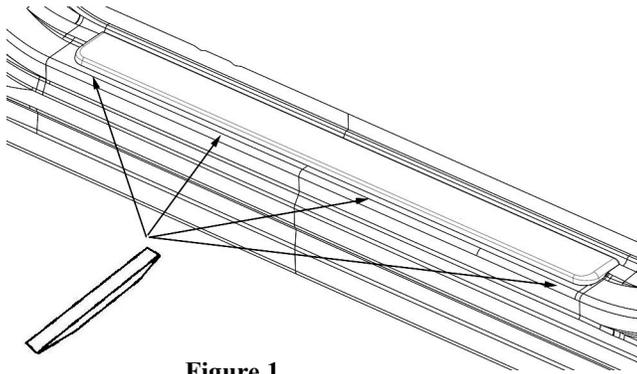


Figure 1

1. Remove front left side plastic kick plate from body.
 - a) Pry up at each clip location (4) with Nylon Trim Removal Tool. (Figure 1)
 - b) Lift the part up to remove.
 - c) Discard Plastic Kick Plate.

2. Starting from the front, align the clips (Figure 2) on the aluminum kick plate assembly with the body holes. (Figure 3)

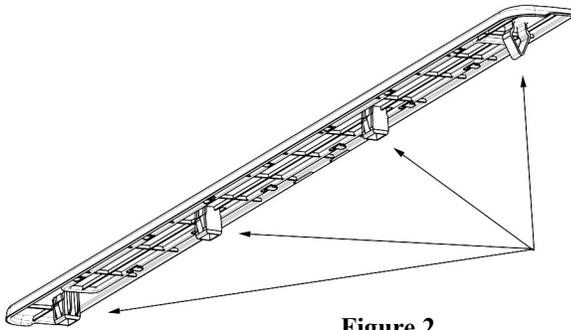


Figure 2

3.
 - a) Cover Aluminum Kick Plate Assembly with a cloth to prevent damage.
 - b) Press down directly above each clip to engage. (Figure 4)

NOTE: Be careful to install left kick plate assembly to left side of vehicle. Mis-installation can cause improper fit.

4. Repeat on other side of car.

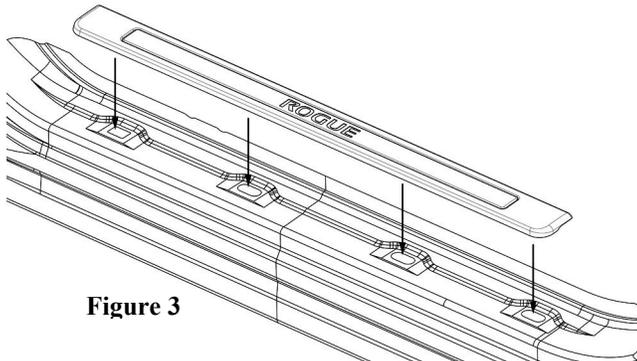


Figure 3

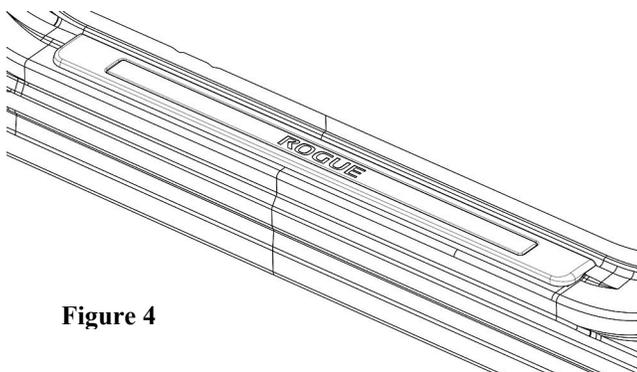


Figure 4

INSTALLATION INSTRUCTIONS – Aluminum Kick Plate

8. REAR INSTALLATION PROCEDURE

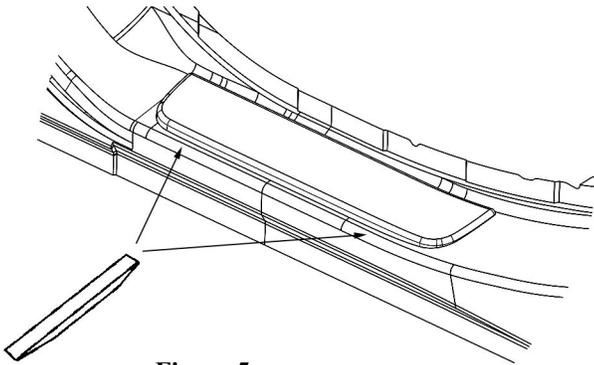


Figure 5

5. Remove rear left side plastic kick plate from body.
 - a) Pry up at each clip location (2) with Nylon Trim Removal Tool. (Figure 5)
 - b) Lift the part up to remove.
 - c) Discard Plastic Kick Plate.

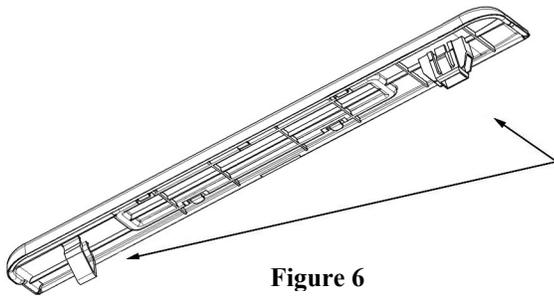


Figure 6

6. Starting from the rear, align the clips (Figure 6) on the aluminum kick plate assembly with the body holes. (Figure 7)

7.
 - a) Cover Aluminum Kick Plate Assembly with a cloth to prevent damage.
 - b) Press down directly above each clip to engage. (Figure 8)

NOTE: Be careful to install left kick plate assembly to left side of vehicle. Mis-installation can cause improper fit.

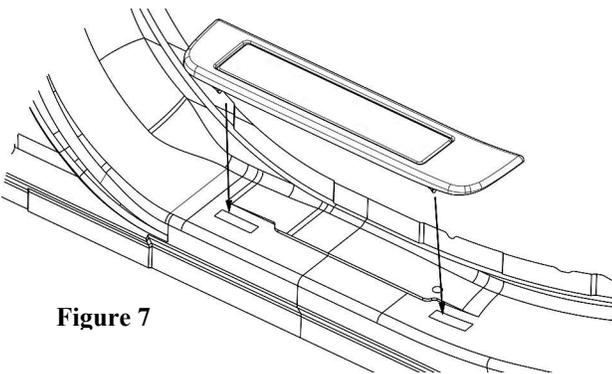


Figure 7

8. Repeat on other side of car.

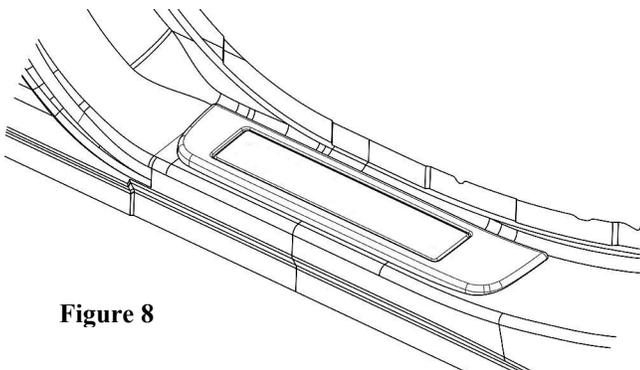


Figure 8