



GENUINE PARTS

INSTALLATION INSTRUCTIONS

- 1. DESCRIPTION:** Kick Plate - Outer
- 2. APPLICATION:** NISSAN Sentra
- 3. PART NUMBER:** 999G6 LT000 and 999G6 LT010
- 4. KIT CONTENTS:**

Item	QTY	Description
A	2	Front kick plate assy
B	2	Rear kick plate assy
C	1	Installation instructions replacement template
D	2	Alcohol pad



A



B



C



D

- 5. TOOLS REQUIRED:**
None.

6. PRE-INSTALLATION CAUTIONS / NOTES:

Read the installation sheet and check the entire kit for possible damage or defects before performing any work.

Clean all areas to be covered with the kick plate kit by using Alcohol pad and allow to dry for 2 minutes (recommended). When cleaning, constantly use a new section of towel as you move from area to area.


CAUTION

- These parts are to be installed when the ambient temperature is between 60°F - 80°F (16°C - 26 °C).
- Do not wash or expose the vehicle to a wet environment for 24 hours after installing the kick plate.
- Install the kick plates in the correct position only after the alcohol has dried.
- The tape will set in 15-20 seconds after the installation.
- Do not reposition part once the tape has started to set/adhere to vehicle.



Kick Plates - Outer


7. INSTALLATION PROCEDURE:

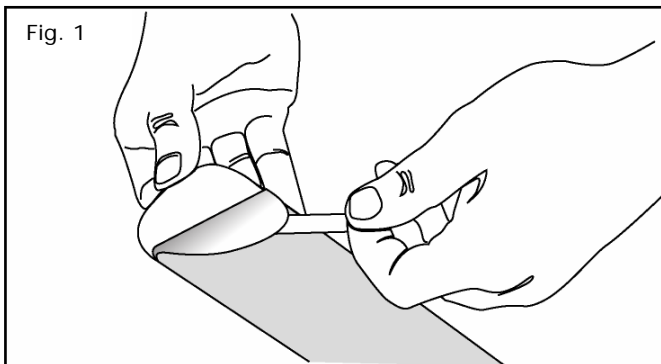


- 1) Dry-fit Kick Plates to determine proper location. **Reference page 3.**
- 2) Clean metal surface with alcohol wipe.
- 3) Pull the pull tab to peel off tape liner. See **Fig. 1.**

⚠ CAUTION

Do not grab the tape side with your fingers to avoid contaminating the tape & reducing adherence strength.

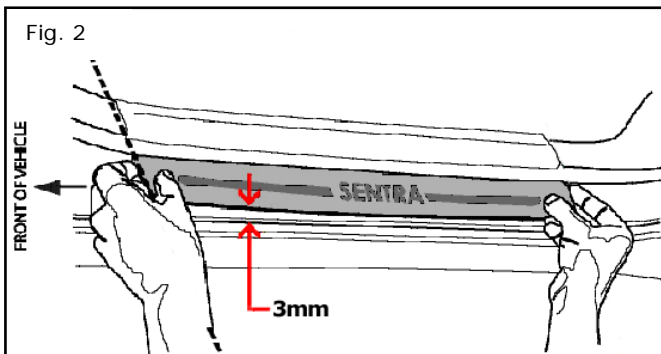

- 4) Install the LH front kick plate as in **Fig. 2.** Starting from the front of the kick plate, align full length of the outside edge of the kick plate 3mm inboard of metal sill.
- 5) Apply low pressure with thumbs along outside edge keeping 3mm setback.
- 6) Make adjustments to allow 3mm constant distance for full length of kick plate.
- 7) Apply even pressure from outside edge to inside edge starting at the center of the kick plate, moving toward each end to secure set contact.
- 8) Repeat the same process on the passenger side.


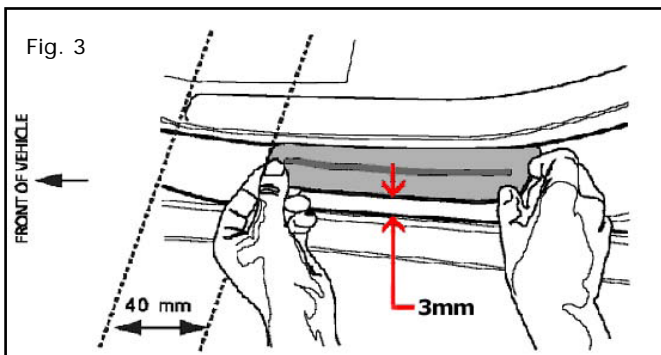


- 9) Install the LH rear kick plate following steps 4) to 7) above and as shown in **Fig. 3.**
- 10) Repeat the same process on the passenger side.





Kick Plates - Outer

8. CORRECT POSITION:

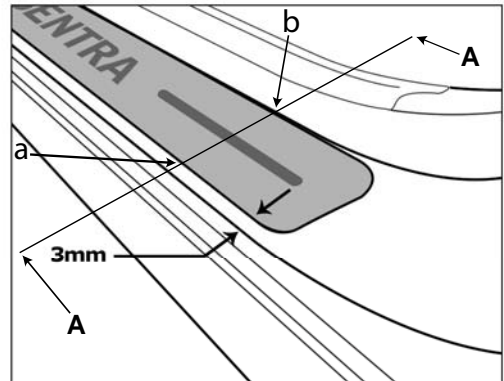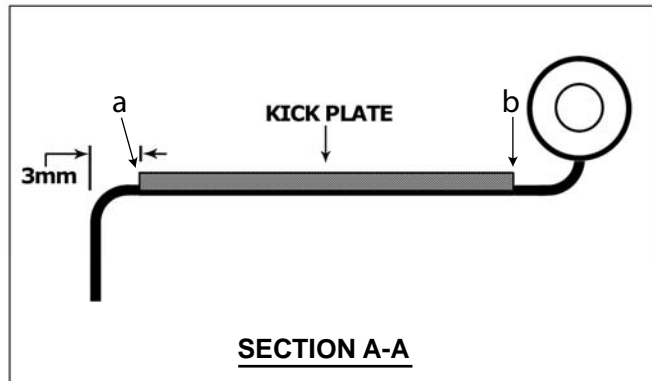

9. INCORRECT POSITION:

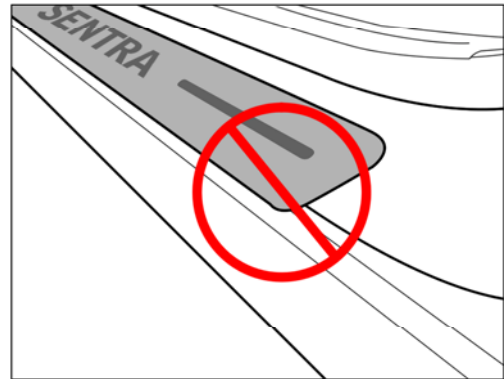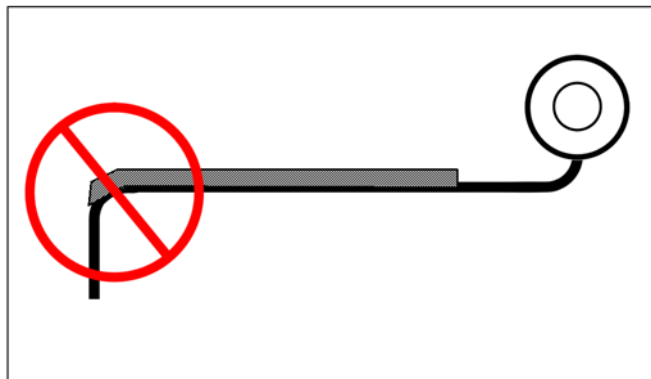

10. INCORRECT POSITION:

