



## GENUINE PARTS

### INSTALLATION INSTRUCTIONS

1. **DESCRIPTION:** Nose Mask
2. **APPLICATION:** Maxima
3. **PART NUMBER:** 999N1 MV000
4. **KIT CONTENTS:**

Item	QTY	Description
A	1	Nose Mask, Main Piece
B	1	Nose Mask, Hood Piece
C	1	Installation Instructions <a href="#">Replacement Template</a>

5. **TOOLS REQUIRED:**

- Scissors

6. **PRE-INSTALLATION CAUTIONS/NOTES:**

- The area to be covered by the mask must be free of dirt. The flannel surface of the nose mask must be especially clean.
- Both the vehicle and the mask must be completely dry. If moisture is present under the mask and is allowed to dry, it may cause the paint to cloud. If mask gets wet, remove and allow to dry completely.
- Any repainted surface in contact with mask must be completely cured.
- DO NOT pull the mask from any of the openings when installing the mask. This may result in DAMAGE to your mask.
- If the nose mask should flap due to high speed or wind conditions, stop car and adjust or remove mask.

**CARE OF NOSE MASK:**

- To clean the vinyl and flannel backing, use a cleaner such as "409" or "Fantastic".
- The vinyl surface may be cleaned by simply spraying the cleaner onto the vinyl and wiping off with a cloth or sponge.
- To clean the flannel backing, liberally spray the cleaner on the area to be cleaned. If heavily soiled, use a cloth or sponge with the cleaner and rub the soiled area gently. Repeat if necessary. Rinse completely with clear water when finished. Hang to dry, but not in direct sunlight. Before installation, ensure both the vehicle and the nose mask are completely dry. If there is moisture under the nose mask and it is not allowed to dry, paint clouding can occur.

### CAUTION

- Attach all elastics with hooks and clips carefully and securely. Accidental release may cause injury.

## INSTALLATION INSTRUCTIONS - Nose Mask

### 7. INSTALLATION PROCEDURE:

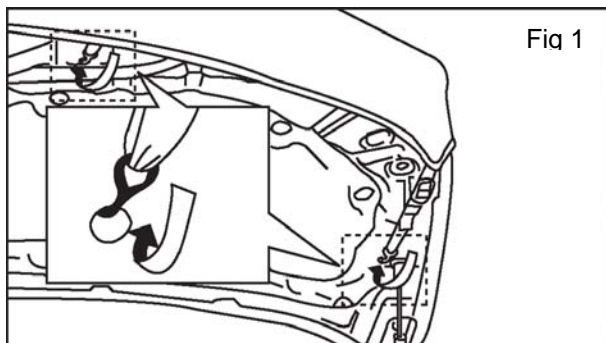


Fig 1

- 1) Install hood piece of nose mask.
  - a) Attach hook with long strap to hole on underside of hood and gently tighten strap to keep hook in hole.
  - b) Perform step a) on other side.
  - c) Attach hook near front portion of the hood to the inside hole of the sheet metal.
  - d) Perform step c) on other side.
  - e) Pull mask snug to hood, tighten straps and secure loose ends in elastic loops.
- 2) Remove license plate and license plate bracket (if applicable).
  - a) Remove 2 license plate screws.
  - b) Remove 2 license plate bracket screws.

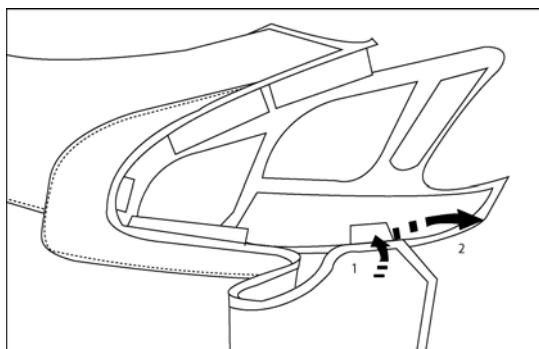


Fig 3

- 3) Secure mask at headlights.
  - a) Insert the front pad into the gap under the headlight
  - b) Perform step a) on other side.
  - c) Insert the rear tab near the front pad and then proceed to move tab rearward.
  - d) Perform step c) on other side.


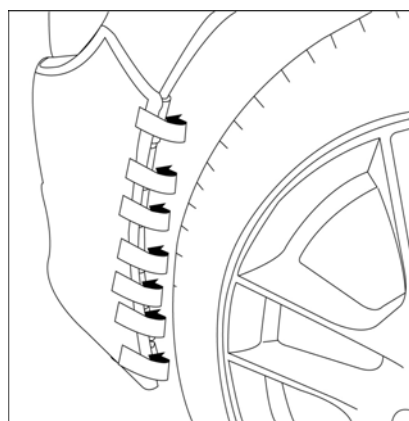



Fig 4

- 4)
  - a) Pull mask down over fascia.
  - b) Attach 7 clips to inside edge of fascia.
  - c) Pull down on bottom corner of mask.
  - d) Perform steps b) and c) on other side.


## INSTALLATION INSTRUCTIONS - Nose Mask

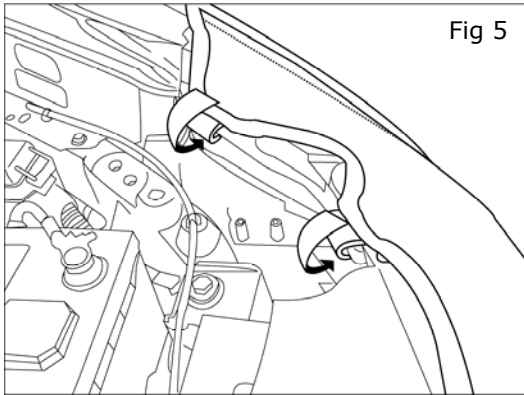



- 5) Secure mask at headlights.
  - a) Attach hook to rear edge of headlight mounting bracket.
  - b) Perform step a) on other side.

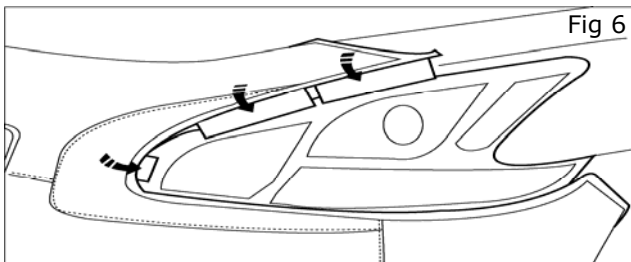


- 6) Secure mask at headlights
  - a) Insert 3 pads into the gap above the headlight
  - b) Perform step a) on other side.

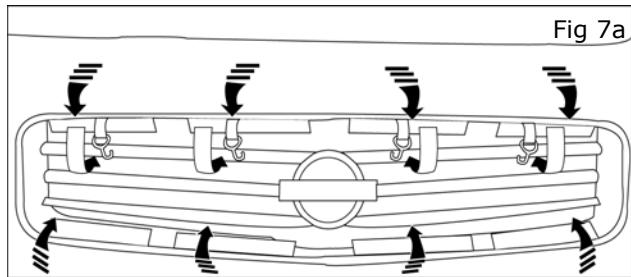

- 7) Secure mask and hooks at grille opening.
  - a) Insert 8 pads into the gap in the grille opening.
  - b) Attach 4 hooks to grille.

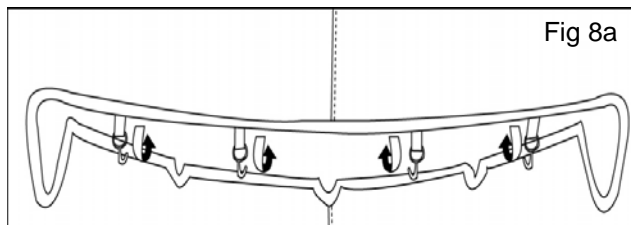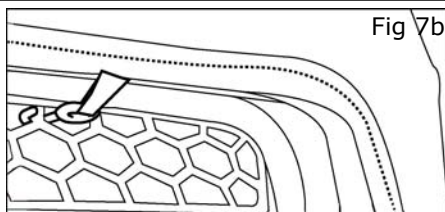

- 8) Secure mask at upper fascia opening.
  - a) Attach 4 hooks to bottom edge of upper fascia opening.
  - b) Attach 8 clips to upper edge of upper fascia opening.

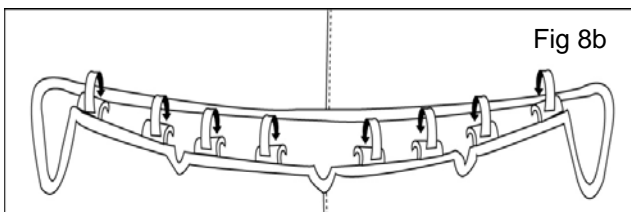

## INSTALLATION INSTRUCTIONS - Nose Mask


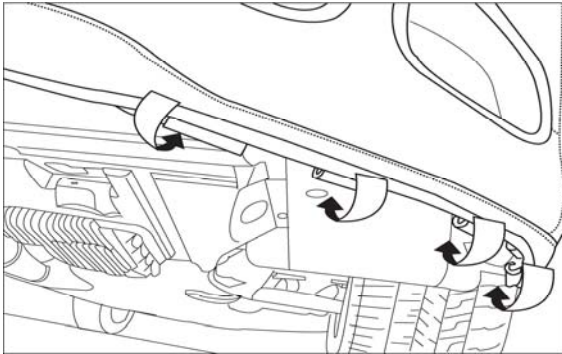


Fig 9

- 9) Secure mask at lower fascia.
  - a) Attach 5 clips to edge of lower fascia in the corners.
  - b) Perform step a) on other side.

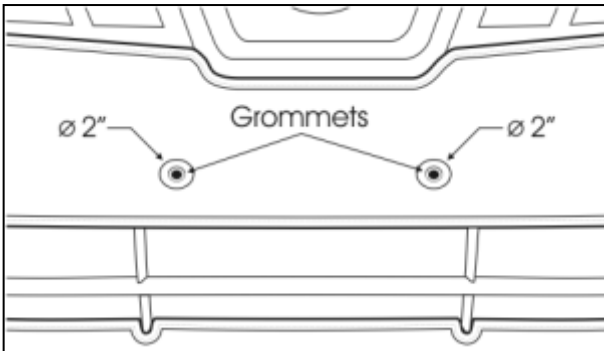

- 10) Reinstall License plate and license plate bracket (If applicable).
  - a) Poke holes through mask into center license plate bracket grommets.
  - b) Cut clearance holes (1"-2") so that license plate bracket pads will rest on fascia.
  - c) Reinstall license plate bracket and plate.