



GENUINE PARTS

INSTALLATION INSTRUCTIONS

DESCRIPTION:	Vehicle Cover
APPLICATION:	Leaf (2011)
PART NUMBER:	999N2 8X001 - Tri Guard Material (Grey) 999N2 8X002 - Silver Guard Plus Material (Silver)

KIT CONTENTS:

Item	Qty.	Part Description
A	1	Vehicle Cover
B	1	Storage Bag
C	1	Installation Instructions Replacement Template

Note: An optional cable lock for the vehicle cover, part number 999N4 A7000, is available from your Nissan dealer.

TOOLS REQUIRED:

- No tools required

INSTALLATION NOTES / CARE & CLEANING

- Vehicle cover must be installed properly and completely. Do not use vehicle with cover installed.
- Wash cover on vehicle with mild soap. Allow sufficient time for cover to air dry completely before storing. DO NOT use bleach!

WARNING

- Do not place vehicle cover over hot exhaust pipes.
- Warning for use in high wind conditions. In high winds (and for prolonged outdoor storage), the cover should be pulled tightly at the center of the vehicle using a length of rope routed through the tie-down grommets in the cover. This should be done even if the optional cable lock is used. The cover can work loose and come off the vehicle if a strong wind goes under the cover.
- Do not use this cover while towing a vehicle. The cover is not designed for use when towing and serious damage can occur to the cover and to the paint on the vehicle.


CAUTION

- If your vehicle is equipped with a cellular phone antenna, remove the mast before installing the cover.
- Some states require the license plate number of a covered vehicle to be clearly displayed; the only type of marking paint acceptable for use on this material is a permanent type fabric/t-shirt paint that is available at most fabric and supply stores. Do not use: regular paint, spray paint, laundry markers, permanent type Magic markers, or any type of felt tip pen or marker.

INSTALLATION INSTRUCTIONS - Vehicle Cover

INSTALLATION PROCEDURE:


- 1) Pre-installation notes
 - a) Read entire installation instructions before proceeding.
 - b) Be careful not to damage any antenna or mirror pocket area when installing cover.
 - c) Watch out for any sharp objects on vehicle that may rip the cover.

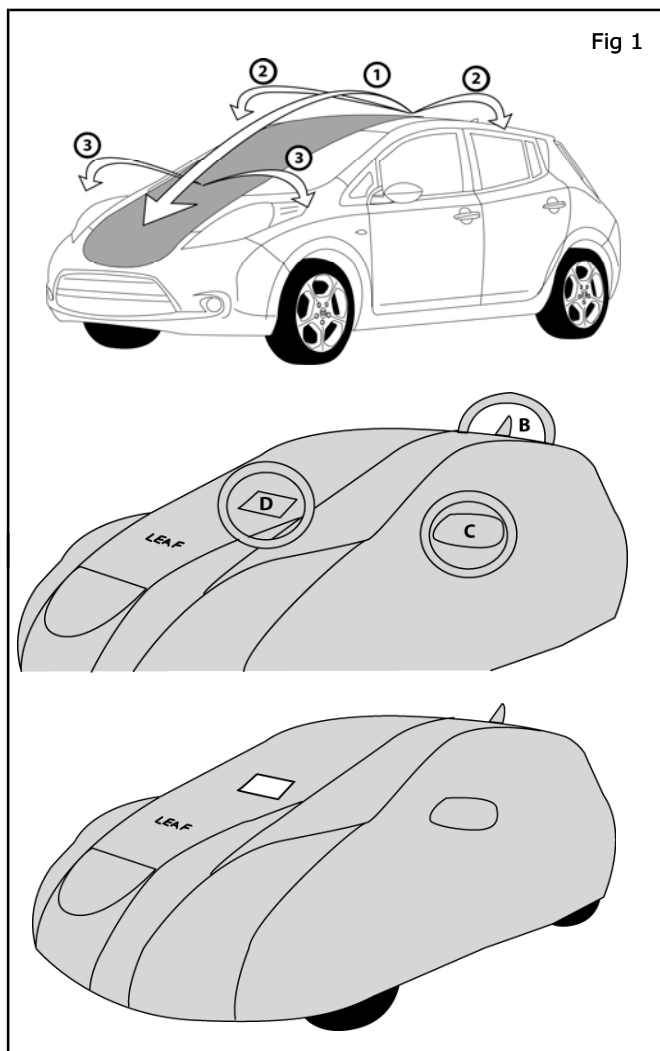


- 2) Installation of vehicle cover
 - a) Lay the cover over the center of the vehicle and open. The Leaf logo will be visible on the front of the vehicle cover.
 - b) Install antenna pocket over antenna (if applicable).
 - c) Install mirror pockets over mirrors.
 - d) Line up window over charging indicator on dash.
 - e) Pull the cover down over the ends of the front and rear bumpers.

INSTALLATION INSTRUCTIONS - Vehicle Cover

INSTALLATION PROCEDURE:

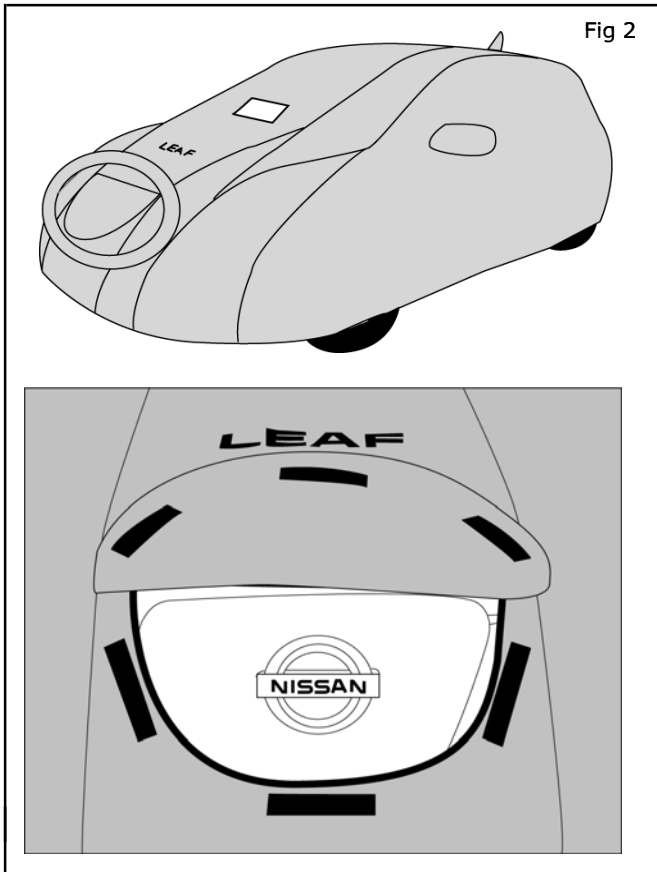

- 3) Installation of vehicle cover
 - e) Align front opening with charge door.

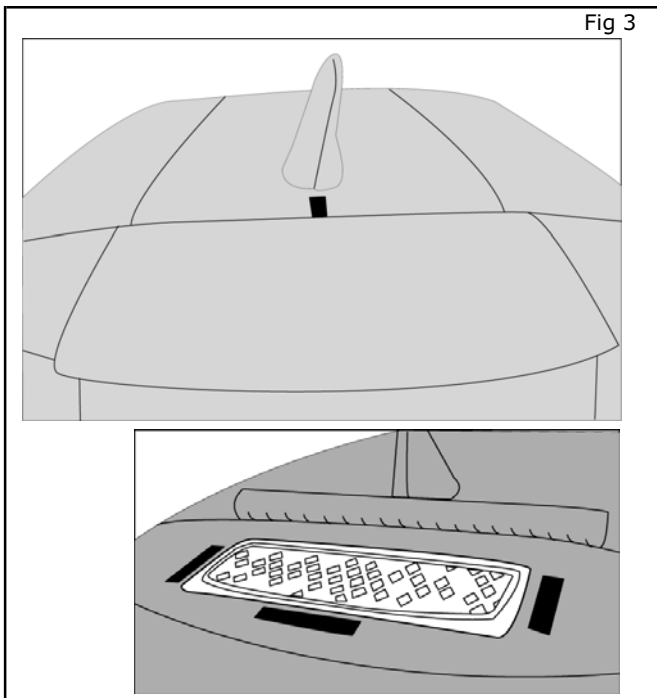

- f) Align opening for solar panel.
- g) To allow solar panel to function roll cover up and attach to velcro located behind antenna pocket.

INSTALLATION INSTRUCTIONS - Vehicle Cover

INSTALLATION PROCEDURE:

- 4) Removal
 - a) Release both ends of the cover from under the bumpers.
 - b) Fold up both sides of the cover towards the center of the vehicle, onto it's top, approximately 2 or 3 feet wide.
 - c) Start at the front of the vehicle and roll the cover from the front to the back.
 - d) Store cover in storage bag.

CAUTION

During installation and removal, user should be careful with antenna.

- 5) Washing and Cleaning
 - a) Machine Washing and Drying (Cover may be washed using a household washing machine and dryer.
 - 1) Use a powder type detergent without bleach.
 - 2) Wash cover using "Normal" or "Permanent Press" cycle in cold or warm water.
 - 3) Run cover through (2) rinse cycles - it is important that all the detergent is removed.
 - 4) The cover can be dried in most household dryers. Use the "Permanent Press" setting.
 - b) On Vehicle Washing and Drying
 - 1) Dust can be cleared off the inside or outside surfaces by putting cover on the vehicle and hosing it off with water. To clean the inside, put the cover on the vehicle inside-out and hose off.
 - 2) After rinsing off the cover, leave it on the vehicle to dry.
 - 3) If the cover becomes solid in a few spots, light brushing with a soft rag will remove most dirt.
 - c) For Persistent Soils
 - 1) Wet soiled area with water.
 - 2) Wash with a mixture of water and powder detergent, working the lather into the soiled area with a sponge.
 - 3) Rinse completely with water to remove all detergent residue.
 - 4) Air dry completely.