



GENUINE PARTS

INSTALLATION INSTRUCTIONS

DESCRIPTION: Nose Mask
APPLICATION: Quest (2011)
PART NUMBER: 999N1 NX000

KIT CONTENTS:

Item	Qty.	Part Description
A	1	Nose Mask, Main Piece
B	1	Nose Mask, Hood Piece
C	1	Installation Instructions

TOOLS REQUIRED:

- None

PRE-INSTALLATION CAUTIONS/NOTES:

- The area to be covered by the mask must be free of dirt. The flannel surface of the nose mask must be especially clean.
- Both the vehicle and the mask must be completely dry. If moisture is present under the mask and is allowed to dry, it may cause the paint to cloud. If mask gets wet, remove and allow to dry completely.
- Any repainted surface in contact with mask must be completely cured.
- DO NOT pull the mask from any of the openings when installing the mask. This may result in DAMAGE to your mask.
- If the nose mask should flap due to high speed or wind conditions, stop car and adjust or remove mask.

CARE OF NOSE MASK:


- To clean the vinyl and flannel backing, use a cleaner such as "409" or "Fantastic".
- The vinyl surface may be cleaned by simply spraying the cleaner onto the vinyl and wiping off with a cloth or sponge.
- To clean the flannel backing, liberally spray the cleaner on the area to be cleaned. If heavily soiled, use a cloth or sponge with the cleaner and rub the soiled area gently. Repeat if necessary. Rinse completely with clear water when finished. Hang to dry, but not in direct sunlight. Before installation, ensure both the vehicle and the nose mask are completely dry. If there is moisture under the nose mask and it is not allowed to dry, paint clouding can occur.

CAUTION

- Attach all hooks and clips carefully and securely. Accidental release may cause injury.


INSTALLATION INSTRUCTIONS - Nose Mask

INSTALLATION PROCEDURE:

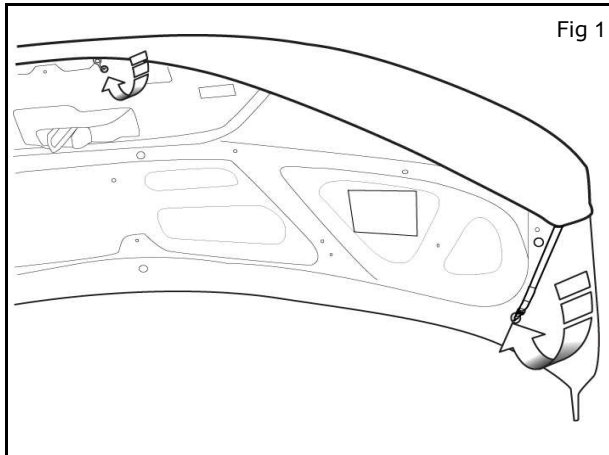


- 1) Install hood piece.
 - a) Attach hook with long strap to hole on underside of hood and gently tighten strap to keep hook in hole.
 - b) Perform step a) on other side.
 - c) Attach nylon strap with metal hook to the hole above the hood latch.
 - d) Perform step c) on other side.
 - e) Pull mask snug to hood, tighten straps and secure loose ends in elastic loops.

- 2) Remove front license plate and license plate bracket (if applicable).
 - a) Remove 2 license plate screws.
 - b) Remove 2 license plate bracket screws.

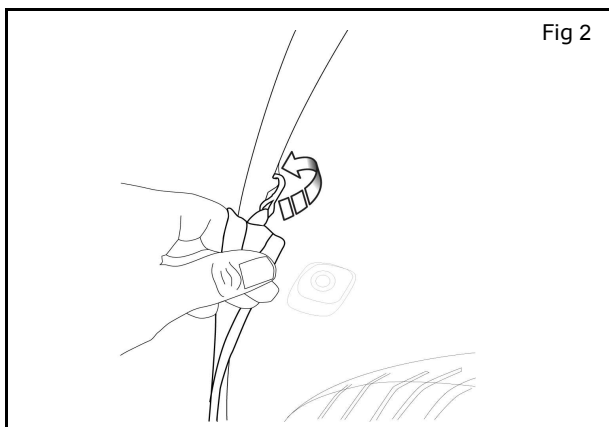


- 3) Attach Main Piece to wheel well area.
 - a) Attach nylon strap with metal hook behind top of metal tab at top of wheel well above tire.
 - b) Repeat step a) on other side of vehicle.
 - c) Pull mask down

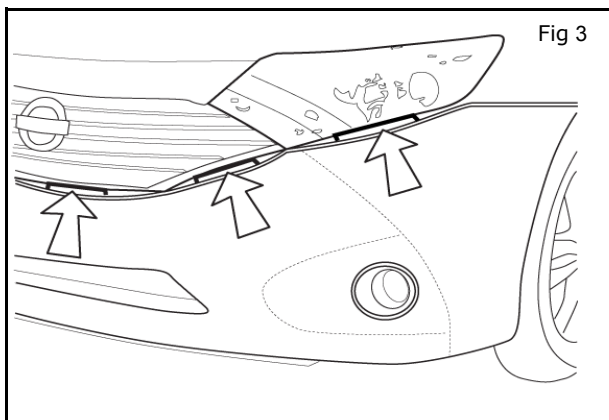


- 4) Secure mask at front grille and headlight.
 - a) Insert (2) pads between bumper and grille.
 - b) Insert (1) pad between headlight and bumper.
 - c) Repeat step a) and b) on other side of vehicle.


INSTALLATION INSTRUCTIONS - Nose Mask

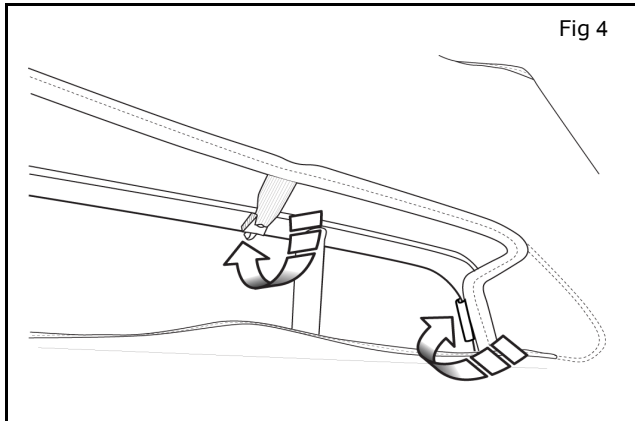

- 5) Secure mask to top and side edge of grill opening.
 - a) Attach (1) elastic with hook to top rear edge of grill opening.
 - b) Attach (1) plastic clip to side edge of grill opening.
 - c) Repeat steps a) and b) on other side of vehicle.

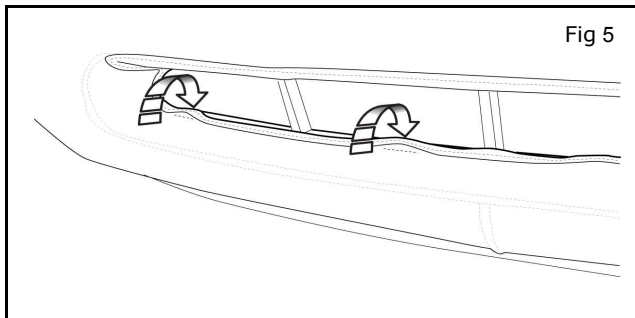


- 6) Secure mask at bottom edge of grill opening.
 - a) Attach (2) plastic clips to bottom rear edge of the intake opening.
 - b) Repeat step a) on other side of vehicle.

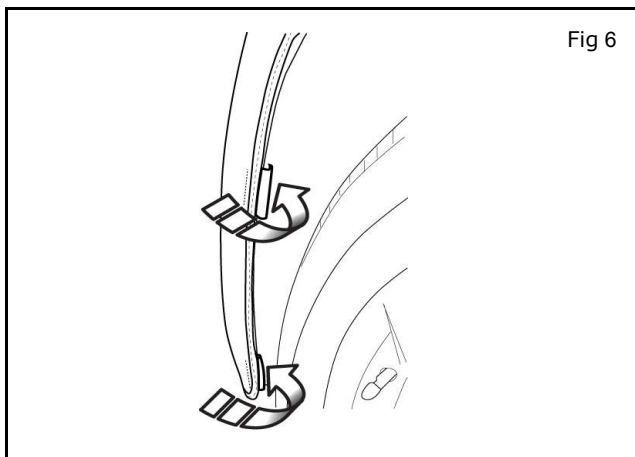


- 7) Attach clips to wheel well
 - a) Attach (2) plastic clips to metal edge of bottom portion of wheel well area.
 - b) Repeat step a) on other side of vehicle.

INSTALLATION INSTRUCTIONS - Nose Mask

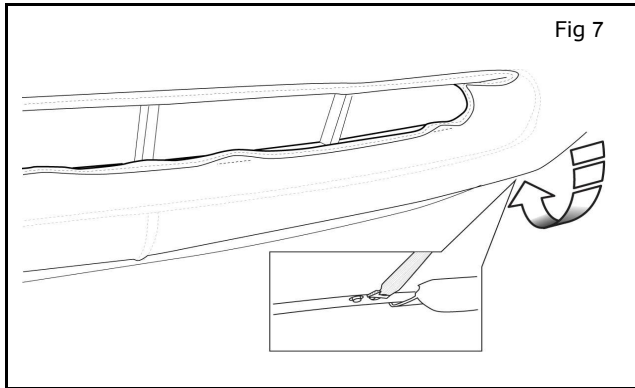

- 8) Secure mask under front bumper.
 - a) Attach (1) elastic with hook to bottom rear edge of bumper.
 - b) Repeat step a) on other side of vehicle.

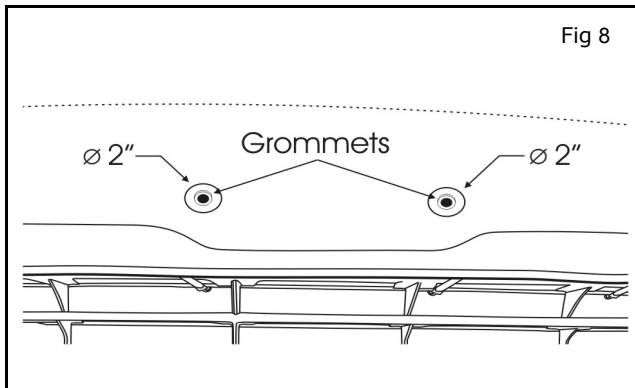

- 9) Reinstall License plate and license plate bracket (if applicable).
 - a) Poke holes through mask into center license plate brackets grommets.
 - b) Cut clearance holes (1"-2" so that license plate bracket pads will rest on fascia).
 - c) Reinstall license plate bracket and plate.