



GENUINE PARTS

INSTALLATION INSTRUCTIONS


DESCRIPTION: Illuminated Kick Plate

APPLICATION: Maxima (Applicable **ONLY** to U.S. Market Vehicles with Build Date June 2012 or later)

PART NUMBER: 999G6 MX000

KIT CONTENTS:

Item	QTY	Description	Service Part Number
A	1	Kick Plate, FR LH	999G6 MX001
B	1	Kick Plate, FR RH	999G6 MX005
C	13	Tie Wrap	Not a service part
D	2	Felt Tape	Not a service part

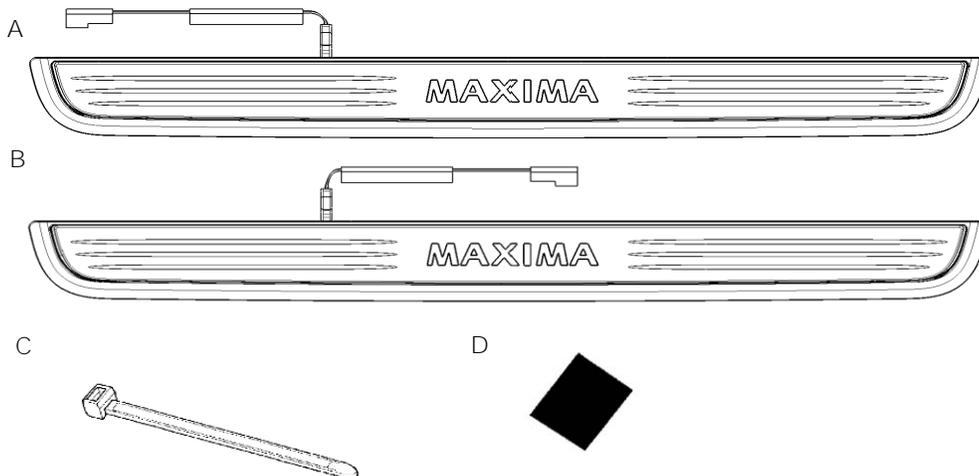

TOOLS REQUIRED:

- Nylon Removal Tool
- Phillips Head Screw Driver
- Flash Light
- Soft cloth
- Alcohol



PRE-INSTALLATION CAUTION/NOTES

- Dealer installation recommended. Instructions may refer to Service Manual.
- Installation may require special tools.
- This part is to be installed at a surface temperature no warmer than 65-100F

CAUTION

- This accessory must only be installed as specified in these instructions.
- Ensure at all times that parts are securely fitted and will not compromise the safe function of vehicle systems.

INSTALLATION OVERVIEW:

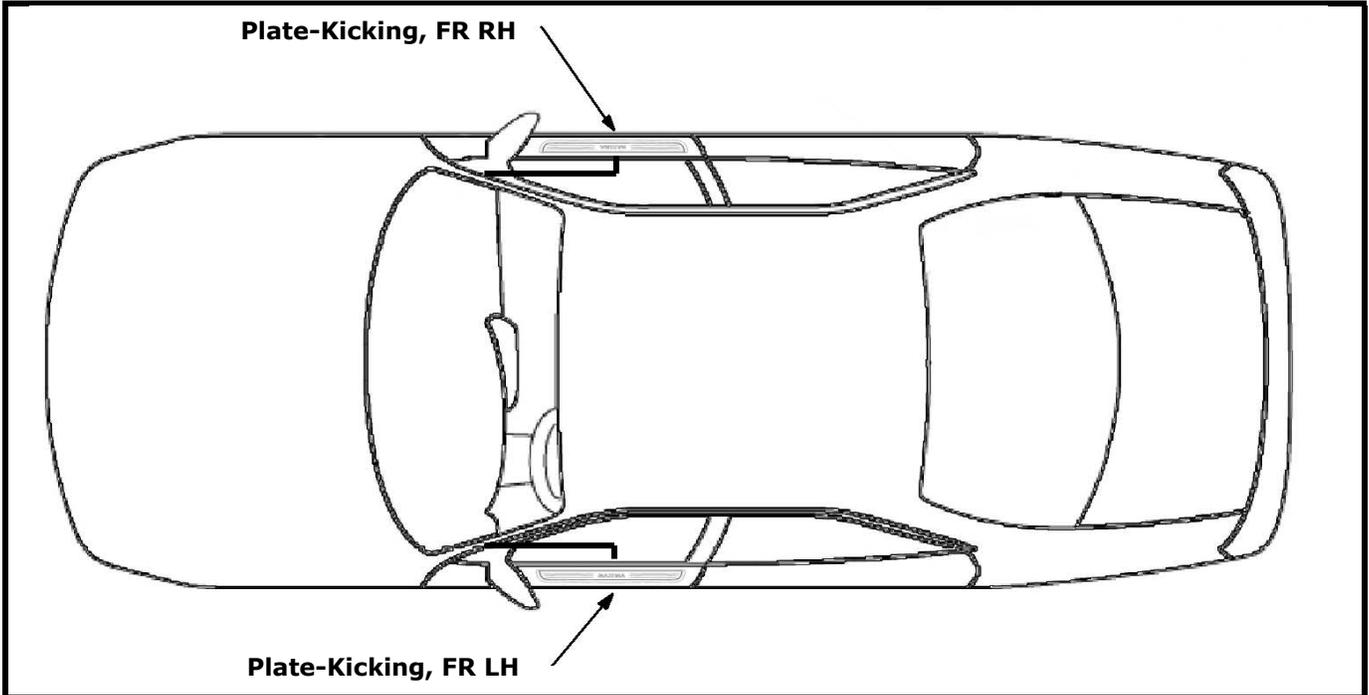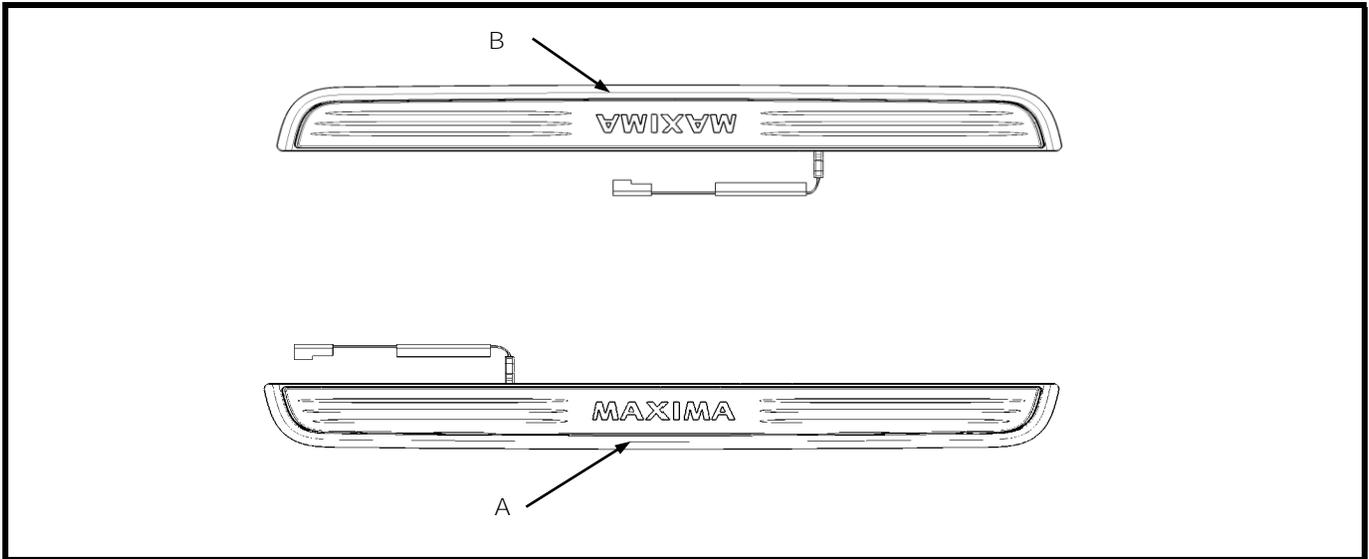

CRITICAL STEPS:

- Locate LH mark on back side of part for LH side installation. Locate RH mark on back side of part for RH side installation. Mis-installation can cause improper fit.

VEHICLE PREPARATION:

⚠ CAUTION

- **Dealer Installation Recommended. Instructions refer to steps described in Service Manual.**
- **Please read these instructions carefully before installing this product for correct installation.**
- **Please DO NOT use or install the part in ways other than what is described in this instruction manual.**
- **If problem occurs during installation, please contact Nissan dealer where you purchased the product.**

- 1) Apply Park Brake.
- 2) Make sure the shift lever is engaged in "P" position.
- 3) Record customer Radio Presets.

Preset	1	2	3	4	5	6
A						
B						
C						


- 4) Use seat and floor protection.
- 5) Open hood of the vehicle.
- 6) Disconnect the negative battery terminal to prevent short circuits during installation.
- 7) This part is to be installed at a vehicle body surface temperature of 65-100°F.

⚠ CAUTION


- **Take care not to scratch or damage any component during the removal or re-installation process.**
- **Trim pieces found to have witness marks or broken clips are not to be re-installed.**

Removal Sequence

1. Front Kick Plate Outer LH
2. Front Kick Plate Inner LH
3. Dashboard Side Lower Panel LH
4. Front Kick Plate Outer RH
5. Front Kick Plate Inner RH
6. Dashboard Side Lower Panel RH

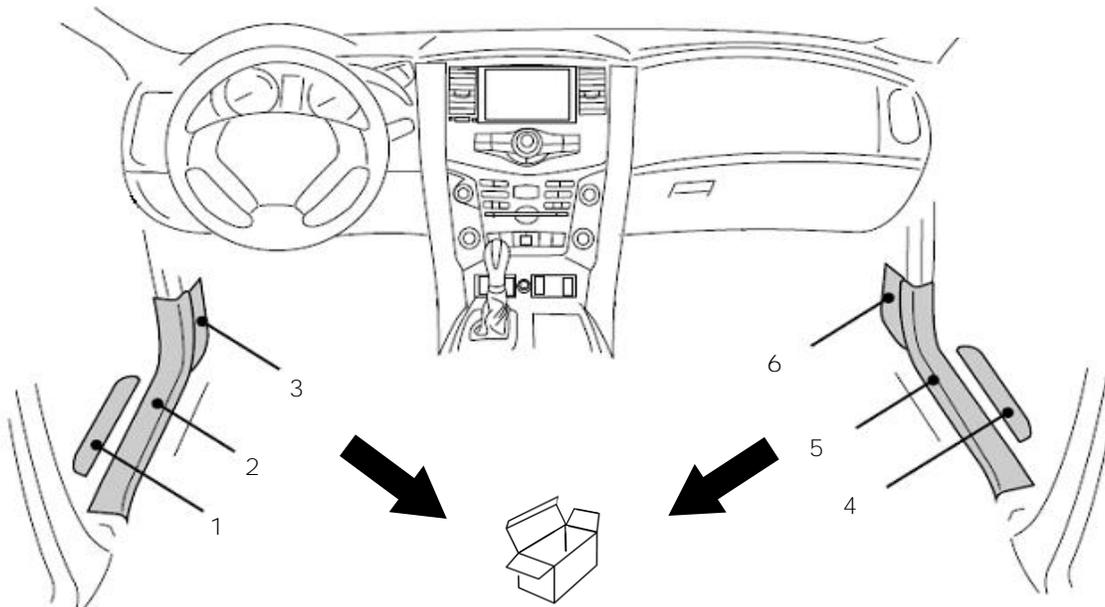


INTERIOR PROCEDURE:

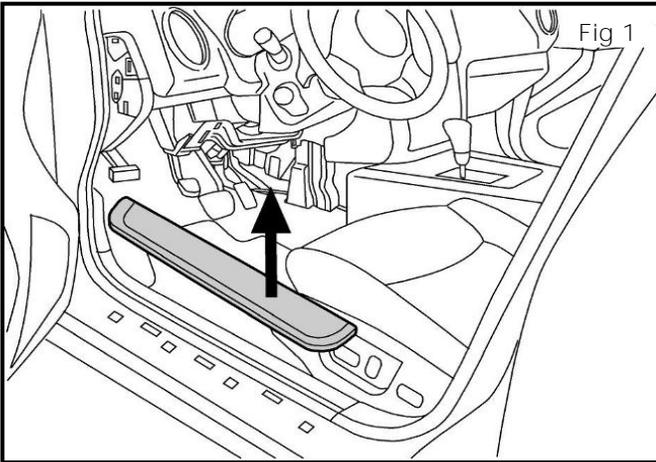

- 1) Front Kicking Plate Outer (LH) Removal
 - a) Start at Rear Edge and pull up by hand. (May need to use tool to pry up end) Fig 1
 - b) There are (4) clips that secure the part.

NOTE:


Repeat on opposite side of vehicle.

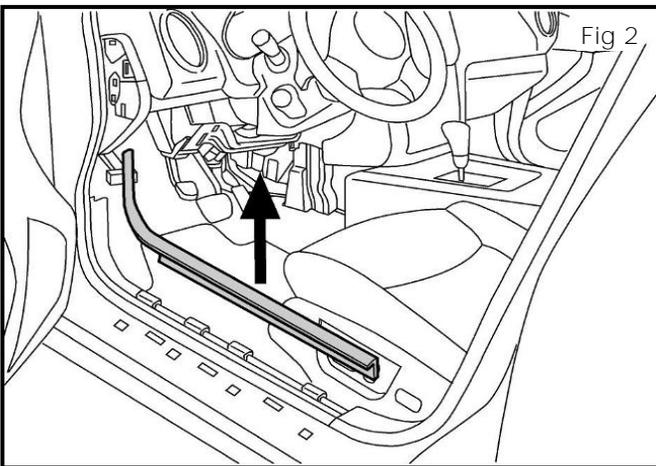

- 2) Front Kicking Plate Inner (LH) Removal
 - a) Starting at Rear Edge, pull up and toward seat using nylon tool.
 - b) Carefully lift part up moving from rear to front. Fig 2
 - c) There are (8) clips that secure the part.

NOTE:

Repeat on opposite side of vehicle.

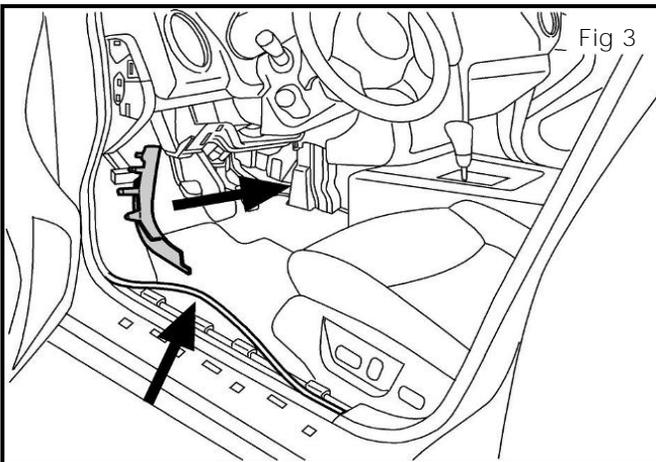

- 3) Remove Dashboard Side Lower Panel
 - a) Starting at the floor, pull part toward the foot pedals. There are (3) clips that secure the part. Fig 3

Weather Seal (LH) Removal


- b) Start at in center of door opening and pull up.
- c) Pull seal away from the body between the b-pillar lower and the side mask. Fig 3

NOTE:

Repeat on opposite side of vehicle.


INTERIOR PROCEDURE: (continue)

The Procedure below shows the installation for LH Side. Repeat Procedure for RH side. Front RH & LH parts are not interchangeable.

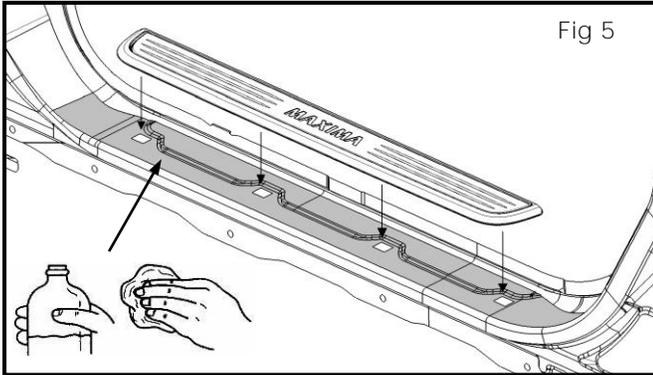

- 5) Install Front Kicking Plate Outer (LH)
 - a) Clean vehicle body with alcohol and allow to dry.
 - b) Starting from the front, align clips on the kicking plate with the body holes.Fig 5


NOTE:
Be careful not to damage clips during installation.

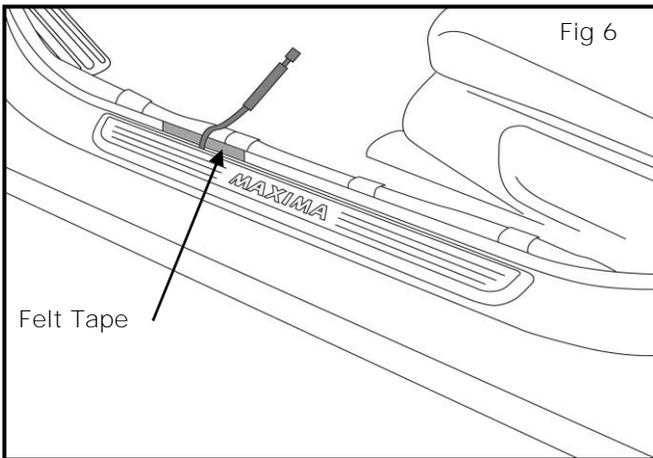


- 6) Install Front Kicking Plate Outer (LH)
 - a) Place Kick Plate over holes.
 - b) Cover top of the kick plate with cloth to prevent damage.
 - c) Press down directly above each clip to engage. Push to snap.
 - d) Apply felt tape over sill flange at wire harness location for harness protection.Fig 6

NOTE: Be careful to install left kicking plate to left side of vehicle. Mis-installation can cause improper fit.
Please check for sharp edges or burrs on sill flange before tape placement.


INTERIOR PROCEDURE: (continue)

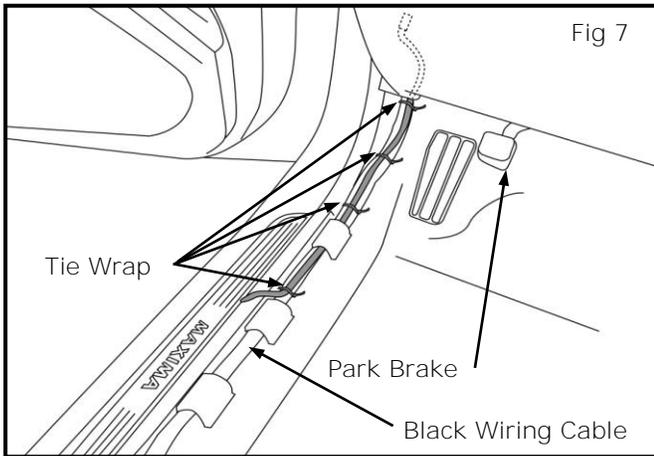

- 7) Secure Wire Harness (LH)
 - a) Route the wire harness to the driver door side of the Park Brake.
 - b) Secure the wire harness with (4) tie wraps to the black wire bundle.
 - c) Maintain a 150mm-200mm gap between tie down points. Fig 7

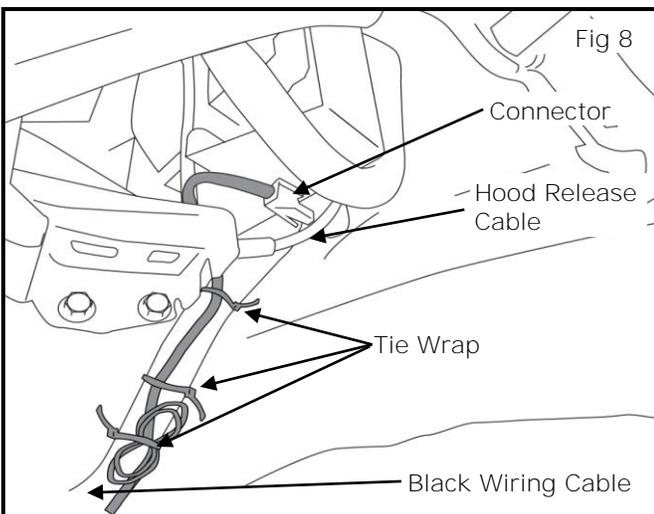


- 8) Secure Wire Harness (LH)
 - a) Route connector up to fuse block panel.
 - b) Plug male end of wire harness into female connector at the bottom of the bracket behind the hood release cable.
 - c) Secure the wire harness with (2) tie wraps to the black wire bundle.
 - d) If you have excess harness, loop the extra length to the vehicle harness with (1) tie wrap.
 - e) Maintain a 150mm-200mm gap between tie down points. Fig 8

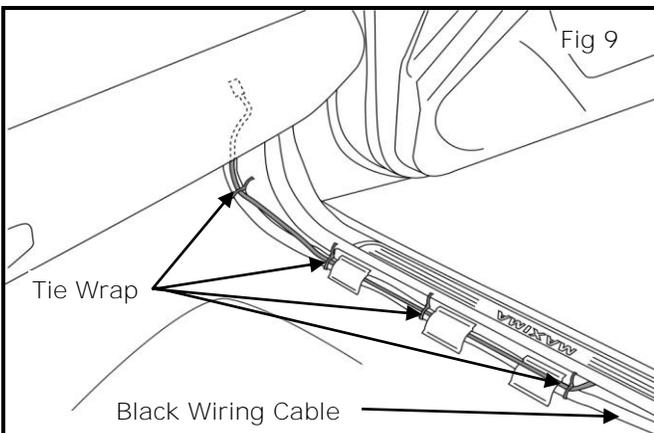

- 9) Secure Wire Harness (RH)
 - a) Route the wire harness to the passenger door under the glove box.
 - b) Secure the wire harness with (4) tie wraps to the black wire bundle.
 - c) Maintain a 150mm-200mm gap between tie down points. Fig 9

INTERIOR PROCEDURE: (continue)

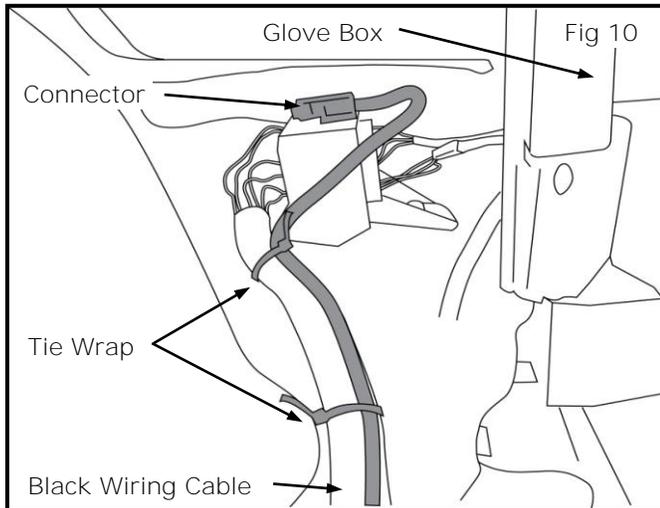

- 10) Secure Wire Harness (RH)
- a) Route connector up and behind glove box.
 - b) Plug male end of wire harness into female connector at the bottom of the bracket behind the glove box..
 - c) Secure the wire harness with (2) tie wraps to the black wire bundle.
 - d) Maintain a 150mm-200mm gap between tie down points. Fig 10

CHECK BEFORE PART REINSTALLATION

- 1) Please check that the installation has no problem.
 - a) confirm the connection of the connectors.
 - b) confirm wire harness attachment to vehicle.
 - c) confirm that there are no loose parts that would cause rattle.

FUNCTION CHECK

- 1) Re-connect battery negative terminal.
- 2) Confirm "MAXIMA" text on the IKP is illuminated with either Front door in the opened position.
- 3) Confirm "MAXIMA" text on the IKP goes off with the dome light when the door switch is pressed, simulating the door is closed.

REINSTALLATION OF REMOVED PARTS

- 1) All removed vehicle parts have been reinstalled.
- 2) Clean interior of vehicle.
- 3) Verify both kick plates are properly installed with no gaps to body.

CAUTION

- Use caution when re-installing interior components to avoid damage, scratch, or breaking of mounting clips.

VEHICLE CHECK

- 1) Remove all tools from the vehicle.
- 2) Inspect re-installed interior trim parts for proper panel fit.
- 3) Turn ignition to ON position.
- 4) Reset radio presets to the recorded setting.
- 5) Confirm proper radio operation.
- 6) Initialize sun roof, and power window operation.
- 7) Turn ignition to OFF position.
- 8) **Check and clear trouble codes.**

CAUTION

- During restoring, please use caution as not to cause the stacking of the vehicle harness, or damage any parts.