

GENUINE PARTS

INSTALLATION INSTRUCTIONS

APPLICATION: Kicks

PART NUMBER: 3N3B1 5RB00

KIT CONTENTS:

Item	Qty.	Part Description	Service Part Number
Α	1	Rear Bumper Protector	3N3B1 5RB00
В	2	Spacer	
С	1	Instruction Replacement Template	

TOOLS REQUIRED:

- Clean, Lint-Free Wiping Cloth
- 100% Alcohol Solution

• Masking Tape


PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:

• Dealer Installation Recommended. Instructions may refer to Service Manual.

A CAUTION


- Install the rear bumper protector when the ambient temperature is above 60oF (15oC).
- Do not wash or expose the vehicle to a wet environment for 24 hours after installing the rear bumper protector.
- Failure to clean the mounting surface properly may cause the adhesive tape to have poor adhesion to the vehicle.

INSTALLATION PROCEDURE:

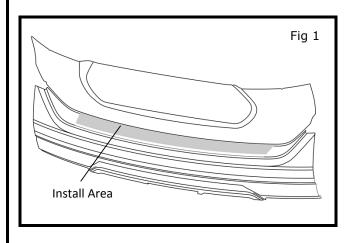


- 1) Clean vehicle thoroughly with soap and water to remove any dirt or debris and allow to dry.
- 2) Rear bumper protector installation prep.
 - a) Open rear hatch.
 - b) Using a clean, lint-free cloth and 100% alcohol solution clean area of rear bumper where part will be installed.
 - c) Allow time to dry thoroughly.

INSTALLATION INSTRUCTIONS - Rear Bumper Protector Kit

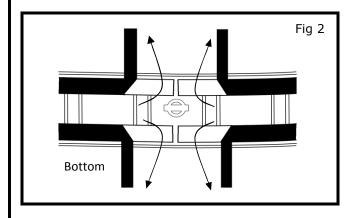


3) At middle of part, peel approximately 30mm of all tape liners (Fig.2).

NOTE: Do not remove all tape liners before installing. Follow Installation Instruction squence of removal.




4) Dry fit bumper protector on vehicle and align bumper protector centering arrow with tailgate latch.

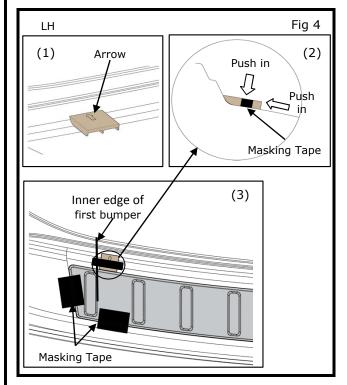


- 5) Place spacer (1) on bumper with arrow pointing toward front of vehicle as shown (Fig.4).
- 6) Push spacer (2) in direction shown (Fig.4).
- 7) Place edge of spacer (3) near edge of first bumper and secure with masking tape as shown (Fig.4).
- 8) Align front edge of Bumper Protector against rear edge of the spacer on LH side.
- 9) Apply tape at LH edge and bottom edge of Bumper Protector (Fig.4).


INSTALLATION INSTRUCTIONS - Rear Bumper Protector Kit

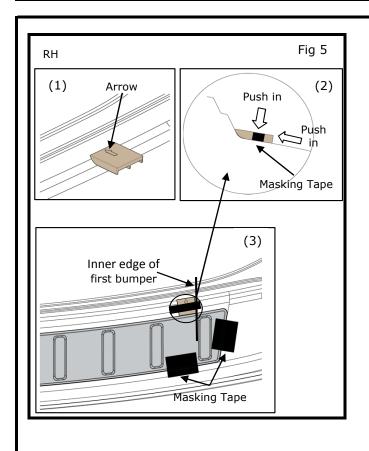

- 10) Place spacer (1) on bumper with arrow pointing toward front of vehicle as shown (Fig.5).
- 11) Push spacer (2) in direction shown (Fig.5).
- 12) Place edge of spacer (3) near edge of first bumper and secure with masking tape as shown (Fig.5).
- 13) Align front edge of Bumper Protector against rear edge of the spacer on RH side.
- 14) Apply tape at RH edge and bottom edge of Bumper Protector (Fig.5).




15) Apply masking tape at center as shown (Fig.6).



16) While holding part in position with one hand, remove tape liners following removal squence and arrow directions as shown (Fig.7).

INSTALLATION INSTRUCTIONS - Rear Bumper Protector Kit

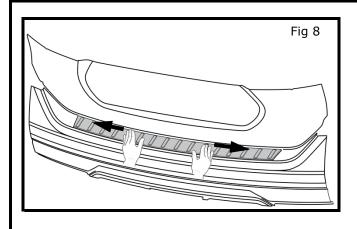

- 17) Using a clean, lint-free cloth, start at center and apply 3 times pressure along tape path.
- 18) Remove masking tapes and spacer.
- 19) Close rear hatch.
- 20) Do not expose vehicle to moisture for 24 hours.